

UTT 2,5-PE - Protective conductor double-level terminal block

3044665

<https://www.phoenixcontact.com/sg/products/3044665>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor double-level terminal block, number of connections: 4, connection method: Screw connection, cross section: 0.14 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: green-yellow

Your advantages

- Since there are two function shafts per level, all potential distribution tasks can be implemented quickly
- For a clear overview, each terminal point supports large-surface labeling
- As an option, the levels can be connected using the FBS-PV UT vertical bridge
- Tested for railway applications
- For example, two separate potentials can be routed side by side with the help of bridging between non-adjacent terminal blocks

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3044665 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | 0183* |
| Product key | BE1124 |
| Catalog page | Page 149 (C-1-2019) |
| GTIN | 4017918997038 |
| Weight per piece (including packing) | 20.36 g |
| Weight per piece (excluding packing) | 20.36 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

UTT 2,5-PE - Protective conductor double-level terminal block



3044665

<https://www.phoenixcontact.com/sg/products/3044665>

Technical data

Notes

General

| | |
|------|---|
| Note | When establishing a connection on the open housing side of a feed-through modular terminal block of the same series and size, the block must be provided with a cover if the expected insulation voltage is >320 V. |
| | The max. load current must not be exceeded by the total current of all connected conductors. |

Product properties

| | |
|-----------------------|-----------------------|
| Product type | Ground terminal block |
| Area of application | Railway industry |
| | Machine building |
| | Plant engineering |
| | Process industry |
| Number of connections | 4 |
| Number of rows | 2 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 0.77 W |

Connection data

| | |
|---------------------------------|---------------------|
| Number of connections per level | 2 |
| Nominal cross section | 2.5 mm ² |

Level 1+2

| | |
|---|--|
| Screw thread | M3 |
| Note | Please observe the current carrying capacity of the DIN rails. |
| Tightening torque | 0.5 ... 0.6 Nm |
| Stripping length | 9 mm |
| Internal cylindrical gage | A3 |
| Connection in acc. with standard | IEC 60947-7-2 |
| Conductor cross section rigid | 0.14 mm ² ... 4 mm ² |
| Cross section AWG | 26 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |

UTTB 2,5-PE - Protective conductor double-level terminal block



3044665

<https://www.phoenixcontact.com/sg/products/3044665>

| | |
|--|--|
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
|--|--|

Ex data

Rated data (ATEX/IECEx)

| | |
|-----------------------------|------------------------|
| Identification | ⊕ II 2 GD Ex eb IIC Gb |
| Operating temperature range | -60 °C ... 110 °C |
| Ex-certified accessories | 3047293 D-UTTB 2,5/4 |
| | 3047303 DP-UTTB 2,5/4 |
| | 1205053 SZS 0,6X3,5 |
| | 3022276 CLIPFIX 35-5 |
| | 3022218 CLIPFIX 35 |
| output | (Permanent) |

Ex connection data General

| | |
|------------------------------|--|
| Torque range | 0.5 Nm ... 0.6 Nm |
| Nominal cross section | 2.5 mm ² |
| Rated cross section AWG | 14 |
| Connection capacity rigid | 0.14 mm ² ... 4 mm ² |
| Connection capacity AWG | 26 ... 12 |
| Connection capacity flexible | 0.14 mm ² ... 2.5 mm ² |
| Connection capacity AWG | 26 ... 14 |

Dimensions

| | |
|--------------------|---------|
| Width | 5.2 mm |
| End cover width | 2.2 mm |
| Height | 69.9 mm |
| Depth | 64.4 mm |
| Depth on NS 35/7,5 | 65 mm |
| Depth on NS 35/15 | 72.5 mm |

Material specifications

| | |
|---|--------------|
| Color | green-yellow |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |

UTT 2,5-PE - Protective conductor double-level terminal block



3044665

<https://www.phoenixcontact.com/sg/products/3044665>

| | |
|---|----------|
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2018-05 |
| Spectrum | Service life test category 2, bogie-mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level | $6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$ |
| Acceleration | 3.12g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Half-sine |
| Acceleration | 30g |
| Shock duration | 18 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |


UTT 2,5-PE - Protective conductor double-level terminal block

3044665

<https://www.phoenixcontact.com/sg/products/3044665>

Drawings

Circuit diagram

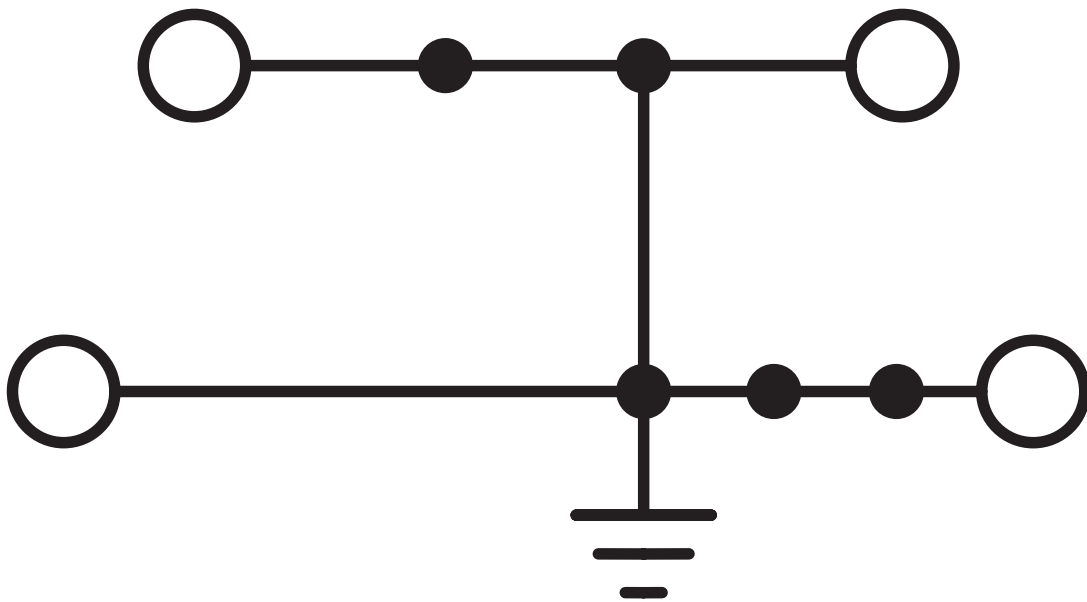

UTT 2,5-PE - Protective conductor double-level terminal block



3044665

<https://www.phoenixcontact.com/sg/products/3044665>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3044665>

| | | | | |
|---------------------------------------|--|--|--|--|
| DNV Approval ID: TAE00001S9 | | | | |
|---------------------------------------|--|--|--|--|

| | | | | |
|----------------------------------|-----------------------|-----------------------|-------------------|----------------------|
| CSA Approval ID: 13631 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | - | - | 26 - 12 | - |

| | | | | |
|---|--|--|--|--|
| ATEX Approval ID: KEMA06ATEX0017U | | | | |
|---|--|--|--|--|

| | | | | |
|---|-----------------------|-----------------------|-------------------|----------------------|
| cUL Recognized Approval ID: E192998 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | - | - | 26 - 12 | - |
| Use group C | - | - | 26 - 12 | - |
| Use group D | - | - | 26 - 12 | - |

| | | | | |
|---|--|--|--|--|
| IECEX Approval ID: IECEX KEM 06.0013U | | | | |
|---|--|--|--|--|

| | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| UL Recognized Approval ID: E192998 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | - | - | 26 - 12 | - |
| Use group C | - | - | 26 - 12 | - |
| Use group D | - | - | 26 - 12 | - |

UTT 2,5-PE - Protective conductor double-level terminal block



3044665

<https://www.phoenixcontact.com/sg/products/3044665>



CCC

Approval ID: 2020322313000622



UKCA-EX

Approval ID: DEKRA 21UKEX0305U



EAC Ex

Approval ID: KZ 7500525010101950

cULus Recognized

UTT 2,5-PE - Protective conductor double-level terminal block



3044665

<https://www.phoenixcontact.com/sg/products/3044665>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141141 |
| ECLASS-13.0 | 27250104 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000901 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

UTT 2,5-PE - Protective conductor double-level terminal block



3044665

<https://www.phoenixcontact.com/sg/products/3044665>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-50 An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
|--|--|

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 4e1cecfa-753d-4623-a791-0db16c2491bb |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg