

USLKG 50 - Ground terminal



0443049

<https://www.phoenixcontact.com/sg/products/0443049>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ground terminal, number of connections: 2, number of positions: 1, connection method: Screw connection, Rated cross section: 50 mm², cross section: 16 mm² - 50 mm², mounting method: PE foot with mounting screw, M6, mounting type: NS 35/7,5, NS 35/15, NS 32, color: green-yellow

Your advantages

- Reliable cable connection is ensured by three-point centering of the conductor in the prismatic sleeve base
- Low contact resistance of the contact surface due to ribbing
- Screw locking by means of spring-loaded elements in the clamping part

Commercial data

Item number	0443049
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	0102*
Product key	BE1221
Catalog page	Page 189 (C-1-2019)
GTIN	4017918002282
Weight per piece (including packing)	182.7 g
Weight per piece (excluding packing)	160 g
Customs tariff number	85369010
Country of origin	PL

USLKG 50 - Ground terminal



0443049

<https://www.phoenixcontact.com/sg/products/0443049>

Technical data

Product properties

Product type	Ground terminal block
Number of positions	1
Number of connections	2
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	4.73 W

Connection data

Number of connections per level	2
Nominal cross section	50 mm ²

Level 1 above 1 below 1

Screw thread	M6
Note	Please observe the current carrying capacity of the DIN rails.
Tightening torque	6 ... 8 Nm
Stripping length	24 mm
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	16 mm ² ... 50 mm ²
Cross section AWG	4 ... 2 (converted acc. to IEC)
Conductor cross section flexible	25 mm ² ... 50 mm ²
Conductor cross section, flexible [AWG]	2 ... 2 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	25 mm ² ... 50 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	25 mm ² ... 50 mm ²
Nominal cross section	50 mm ²

Ex data

Rated data (ATEX/IECEx)

Identification	Ⓔ II 2 GD Ex eb IIC Gb
Operating temperature range	-60 °C ... 110 °C
Ex-certified accessories	1205082 SZS 1,2X8,0 VDE
	1201659 E/AL-NS 32
	1201662 E/AL-NS 35
Torque range for PE foot	6 Nm ... 8 Nm
output	(Permanent)

USLKG 50 - Ground terminal



0443049

<https://www.phoenixcontact.com/sg/products/0443049>

Ex connection data General

Torque range	6 Nm ... 8 Nm
Nominal cross section	50 mm ²
Rated cross section AWG	1/0
Connection capacity rigid	16 mm ² ... 50 mm ²
Connection capacity AWG	6 ... 1/0
Connection capacity flexible	25 mm ² ... 50 mm ²
Connection capacity AWG	4 ... 1/0

Dimensions

Width	20 mm
Height	70.5 mm
Depth on NS 32	81 mm
Depth on NS 35/15	83.5 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Mechanical properties

General

Terminal block mounting	6 Nm ... 8 Nm (PE foot with mounting screw, M6)
-------------------------	---

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-2
----------------------------------	---------------

USLKG 50 - Ground terminal

0443049

<https://www.phoenixcontact.com/sg/products/0443049>



Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Terminal block mounting	6 Nm ... 8 Nm (PE foot with mounting screw, M6)

USLKG 50 - Ground terminal


0443049

<https://www.phoenixcontact.com/sg/products/0443049>



Drawings

Circuit diagram

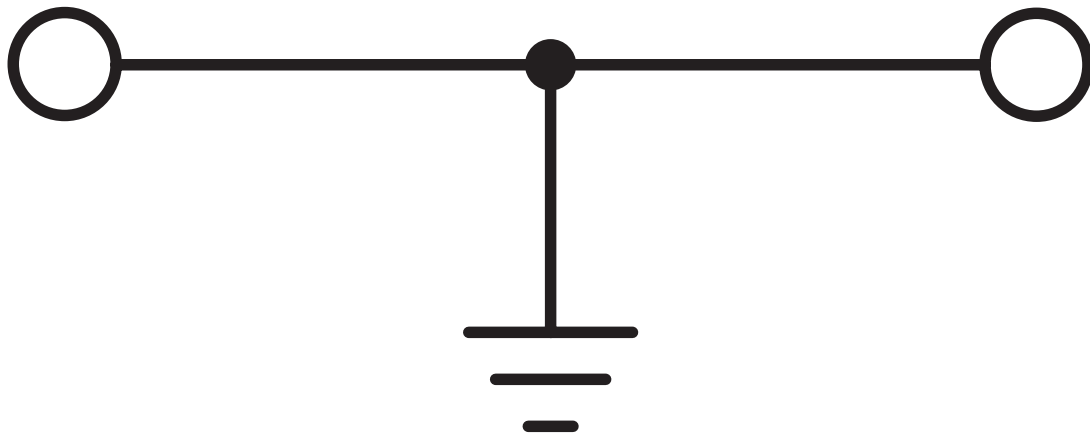

USLKG 50 - Ground terminal



0443049

<https://www.phoenixcontact.com/sg/products/0443049>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/0443049>



LR

Approval ID: LR2420186TA



CSA

Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	600 V	-	6 - 1/0	-
Use group C	600 V	-	6 - 1/0	-
Use group D	600 V	-	6 - 1/0	-



cULus Recognized

Approval ID: E60425

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	-	-	6 - 1/0	-
Use group C	-	-	6 - 1/0	-



LR

Approval ID: LR2041789TA-02



BV

Approval ID: 07774/E0 BV

DNV

Approval ID: TAE00001CT



ATEX

Approval ID: KEMA99ATEX4487U



cUL Recognized

Approval ID: E192998

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
--	-----------------------	-----------------------	-------------------	-----------------------------


USLKG 50 - Ground terminal

0443049


<https://www.phoenixcontact.com/sg/products/0443049>




	-	-	6 - 1/0	-
--	---	---	---------	---




EAC Ex
Approval ID: KZ 7500525010101950




IEC Ex
Approval ID: IECExKEM06.0035U

	UL Recognized Approval ID: E192998			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	-	-	6 - 1/0	-



CCC
Approval ID: 2020322313000623



UKCA-EX
Approval ID: DEKRA 21UKEX0308U

cULus Recognized

USLKG 50 - Ground terminal



0443049

<https://www.phoenixcontact.com/sg/products/0443049>

Classifications

ECLASS

ECLASS-11.0	27141141
ECLASS-13.0	27250103

ETIM

ETIM 9.0	EC000901
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

USLKG 50 - Ground terminal



0443049
<https://www.phoenixcontact.com/sg/products/0443049>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg