

UGSK/S - Slide-type terminal block



0305080

<https://www.phoenixcontact.com/sg/products/0305080>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Slide-type terminal block, without slide, nom. voltage: 500 V, nominal current: 41 A, number of connections: 2, connection method: Screw connection, 1 level, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- Measuring equipment or protective relays can be individually connected with the aid of bridges and slides
- Here, the slides make contact with the switching jumper depending on the switching task

Commercial data

Item number	0305080
Packing unit	50 pc
Minimum order quantity	1 pc
Sales key	0105*
Product key	BE1233
Catalog page	Page 517 (C-1-2019)
GTIN	4017918000745
Weight per piece (including packing)	27.363 g
Weight per piece (excluding packing)	26.079 g
Customs tariff number	85369010
Country of origin	DE

UGSK/S - Slide-type terminal block



0305080

<https://www.phoenixcontact.com/sg/products/0305080>

Technical data

Product properties

Product type	Feed-through terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Nominal cross section	6 mm ²
-----------------------	-------------------

1 level

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	11 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	41 A
Maximum load current	57 A (with 10 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	6 mm ²

Dimensions

Width	8.2 mm
Height	61 mm
Depth on NS 35/7,5	53.5 mm

UGSK/S - Slide-type terminal block



0305080

<https://www.phoenixcontact.com/sg/products/0305080>

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-40 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
	Test passed
Short-time withstand current 6 mm ²	4.1 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg

UGSK/S - Slide-type terminal block



0305080

<https://www.phoenixcontact.com/sg/products/0305080>

	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32


UGSK/S - Slide-type terminal block

0305080

<https://www.phoenixcontact.com/sg/products/0305080>

Drawings

Circuit diagram

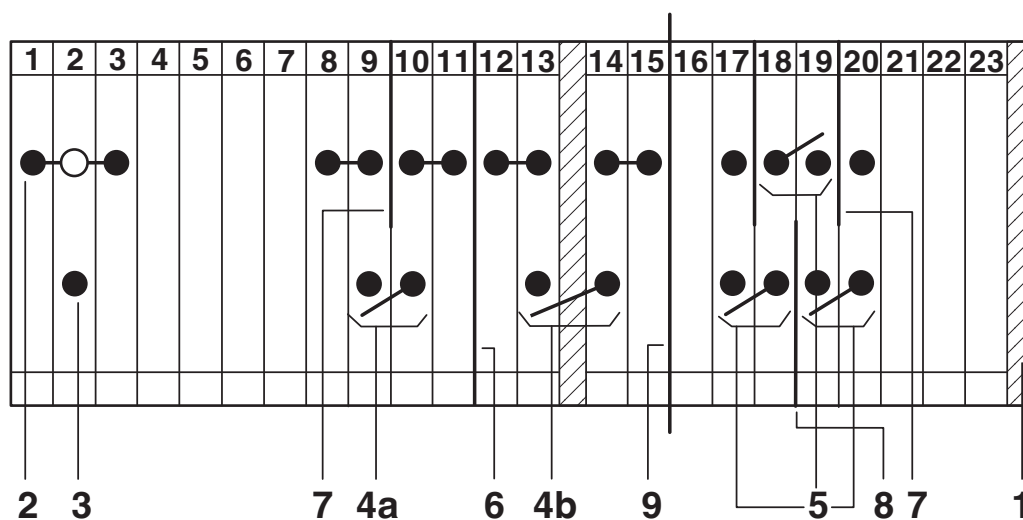

- 1 = cover
- 2 = fixed bridge
- 3 = slide
- 4 = switch bar for 2 terminal blocks
- 5 = double switch bar
- 6 = separating plate
- 7 = special separating plate, with cutout top left
- 8 = special separating plate, with cutout top right
- 9 = partition plate
- 10 = Zack marker strip
- 11 = screwdriver

UGSK/S - Slide-type terminal block



0305080

<https://www.phoenixcontact.com/sg/products/0305080>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/0305080>



cULus Recognized

Approval ID: E60425



EAC

Approval ID: EACKZ 08593



cULus Recognized

Approval ID: E60425

UGSK/S - Slide-type terminal block

0305080

<https://www.phoenixcontact.com/sg/products/0305080>



Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UGSK/S - Slide-type terminal block



0305080
<https://www.phoenixcontact.com/sg/products/0305080>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg