

UT 1,5 OG - Feed-through terminal block



1467081

<https://www.phoenixcontact.com/sg/products/1467081>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 17.5 A, number of connections: 2, connection method: Screw connection, Rated cross section: 1.5 mm², cross section: 0.14 mm² - 1.5 mm², mounting type: NS 35/7,5, NS 35/15, color: orange

Your advantages

- The large wiring space enables the connection of solid and stranded conductors without ferrules, even above the nominal cross section
- As well as saving space, the compact design enables user-friendly wiring in a small amount of space
- Optimum screwdriver guidance through closed screw shafts
- Tested for railway applications
- The cable entry funnel enables the use of conductors with ferrules and plastic collars within the nominal cross section

Commercial data

Item number	1467081
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	*****
Product key	BE1111
GTIN	4063151862824
Weight per piece (including packing)	5.83 g
Weight per piece (excluding packing)	5.705 g
Customs tariff number	85369010
Country of origin	IN

UT 1,5 OG - Feed-through terminal block



1467081

<https://www.phoenixcontact.com/sg/products/1467081>

Technical data

Product properties

Product type	Feed-through terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
	Process industry
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Number of connections per level	2
Nominal cross section	1.5 mm ²
Rated cross section AWG	16
Screw thread	M2
Tightening torque	0.22 ... 0.25 Nm
Stripping length	7 mm ... 8 mm
Internal cylindrical gage	A1
	B1
Conductor cross section rigid	0.14 mm ² ... 1.5 mm ²
Cross section AWG	26 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 1 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 0.75 mm ²
2 conductors with same cross section, solid	0.14 mm ² ... 0.75 mm ²
2 conductors with same cross section, flexible	0.14 mm ² ... 0.75 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.14 mm ² ... 0.34 mm ²
Nominal current	17.5 A
Maximum load current	17.5 A (with 1.5 mm ² conductor cross section)
Nominal voltage	1000 V
Nominal cross section	1.5 mm ²

UT 1,5 OG - Feed-through terminal block



1467081

<https://www.phoenixcontact.com/sg/products/1467081>

Dimensions

Width	4.15 mm
Height	48 mm
Depth	46.9 mm

Material specifications

Color	orange (RAL 2003)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15

UT 1,5 OG - Feed-through terminal block


1467081

<https://www.phoenixcontact.com/sg/products/1467081>



Drawings

Circuit diagram

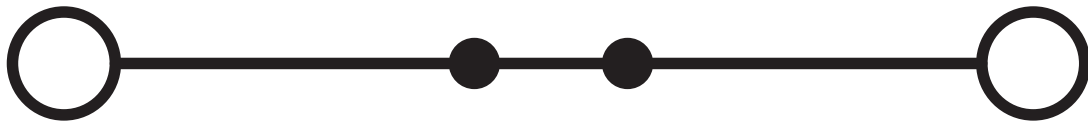

UT 1,5 OG - Feed-through terminal block



1467081

<https://www.phoenixcontact.com/sg/products/1467081>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1467081>



cULus Recognized
Approval ID: E60425



cCSAus
Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	600 V	15 A	30 - 14	-
Use group C	600 V	15 A	30 - 14	-
Use group F	1000 V	15 A	30 - 14	-
Use group D	600 V	5 A	30 - 14	-

DNV

Approval ID: TAE00001S9



cULus Recognized
Approval ID: E60425

UT 1,5 OG - Feed-through terminal block



1467081

<https://www.phoenixcontact.com/sg/products/1467081>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UT 1,5 OG - Feed-through terminal block



1467081

<https://www.phoenixcontact.com/sg/products/1467081>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg