


PTTB 1,5/S-PE/N - Protective conductor double-level terminal block



3208566

<https://www.phoenixcontact.com/sg/products/3208566>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor double-level terminal block, nom. voltage: 500 V, nominal current: 16 A, connection method: Push-in connection, 1st and 2nd level, Rated cross section: 1.5 mm², cross section: 0.14 mm² - 1.5 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- The compact design and front connection enable wiring in a confined space
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off

Commercial data

| | |
|--------------------------------------|--------------------|
| Item number | 3208566 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | ***** |
| Product key | BE2224 |
| Catalog page | Page 40 (C-1-2019) |
| GTIN | 4046356564496 |
| Weight per piece (including packing) | 8.731 g |
| Weight per piece (excluding packing) | 9.01 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

PTTB 1,5/S-PE/N - Protective conductor double-level terminal block



3208566

<https://www.phoenixcontact.com/sg/products/3208566>

Technical data

Product properties

| | |
|-----------------------|-----------------------|
| Product type | Ground terminal block |
| Number of connections | 4 |
| Number of rows | 2 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 0.56 W |

Connection data

| | |
|---------------------------------|---------------------|
| PEN function | yes |
| Number of connections per level | 2 |
| Nominal cross section | 1.5 mm ² |

1st and 2nd level

| | |
|---|--|
| Note | Please observe the current carrying capacity of the DIN rails. |
| Stripping length | 8 mm ... 10 mm |
| Internal cylindrical gage | A1 / B1 |
| Connection in acc. with standard | IEC 60947-7-1/IEC 60947-7-2 |
| Conductor cross section rigid | 0.14 mm ² ... 1.5 mm ² |
| Cross section AWG | 26 ... 16 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 1.5 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 16 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 1.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 1 mm ² Using the AI-S 1-8 TQ ferrule, Item No. 1200293, is recommended |
| Nominal current | 16 A |
| Maximum load current | 16 A |
| Nominal voltage | 500 V |
| Nominal cross section | 1.5 mm ² |

1st and 2nd level Connection cross sections directly pluggable

| | |
|---|--|
| Conductor cross section rigid | 0.25 mm ² ... 1.5 mm ² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.34 mm ² ... 1.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.34 mm ² ... 1 mm ² |

Dimensions

| | |
|-------|--------|
| Width | 3.5 mm |
|-------|--------|

PTTB 1,5/S-PE/N - Protective conductor double-level terminal block



3208566

<https://www.phoenixcontact.com/sg/products/3208566>

| | |
|--------------------|---------|
| End cover width | 2.2 mm |
| Height | 65.4 mm |
| Depth | 41.1 mm |
| Depth on NS 35/7,5 | 42.6 mm |
| Depth on NS 35/15 | 50.1 mm |

Material specifications

| | |
|---|-----------------|
| Color | gray (RAL 7042) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|-----------------------------|
| Connection in acc. with standard | IEC 60947-7-1/IEC 60947-7-2 |
|----------------------------------|-----------------------------|

Mounting

PTTB 1,5/S-PE/N - Protective conductor double-level terminal block



3208566

<https://www.phoenixcontact.com/sg/products/3208566>

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |


PTTB 1,5/S-PE/N - Protective conductor double-level terminal block

3208566

<https://www.phoenixcontact.com/sg/products/3208566>

Drawings

Circuit diagram

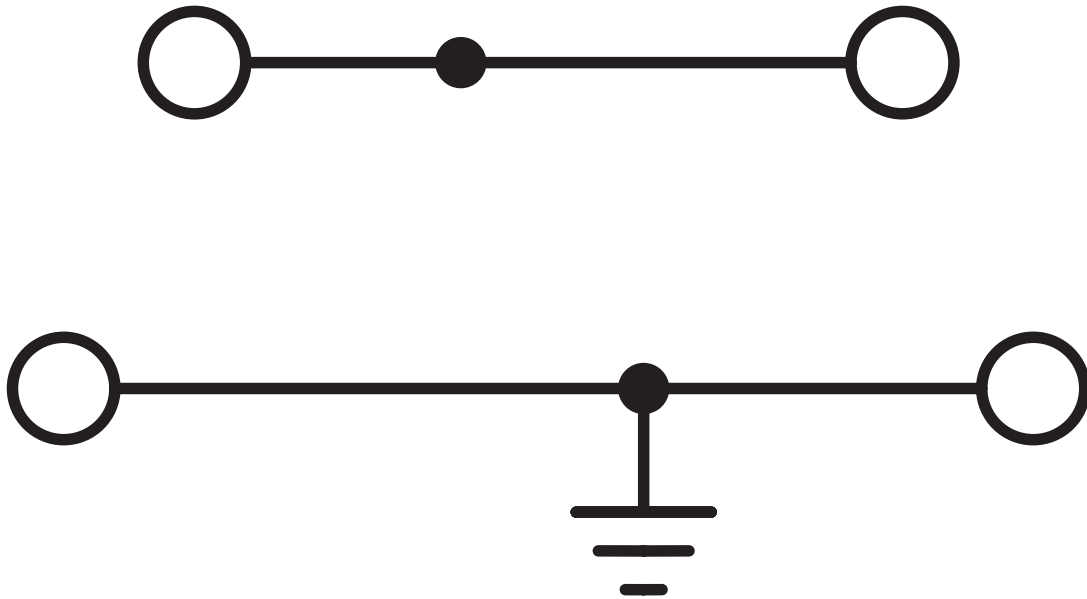

PTTB 1,5/S-PE/N - Protective conductor double-level terminal block




3208566


<https://www.phoenixcontact.com/sg/products/3208566>

Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3208566>

|  CSA Approval ID: 2030668 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 300 V | 15 A | 26 - 14 | - |
| Use group C | 300 V | 15 A | 26 - 14 | - |
| Use group D | 600 V | 5 A | 26 - 14 | - |

|  EAC Approval ID: RU C-DE.BL08.B.00644 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 300 V | 15 A | 26 - 14 | - |
| PE connection | - | - | 26 - 14 | - |
| Use group C | 300 V | 15 A | 26 - 14 | - |
| PE connection | - | - | 26 - 14 | - |
| Use group D | 600 V | 5 A | 26 - 14 | - |
| PE connection | - | - | 26 - 14 | - |

|  LR Approval ID: LR2371832TA | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  ClassNK Approval ID: 14ME0912 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  BV Approval ID: 39980/B0 BV | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

PTTB 1,5/S-PE/N - Protective conductor double-level terminal block



3208566

<https://www.phoenixcontact.com/sg/products/3208566>

DNV

Approval ID: TAE000010T

ERC

EAC

Approval ID: EACKZ 08593

PTTB 1,5/S-PE/N - Protective conductor double-level terminal block



3208566

<https://www.phoenixcontact.com/sg/products/3208566>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141141 |
| ECLASS-13.0 | 27250104 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000901 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

PTTB 1,5/S-PE/N - Protective conductor double-level terminal block



3208566

<https://www.phoenixcontact.com/sg/products/3208566>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg