


PTV 4-TWIN-PE - Ground terminal

1088733

<https://www.phoenixcontact.com/sg/products/1088733>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ground terminal, number of connections: 3, connection method: Push-in connection, 1 level, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², mounting type: NS 35/7,5, NS 35/15, color: green/yellow

Your advantages

- Clear wiring, thanks to lateral conductor entry
- The compact design enables wiring in a confined space
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1088733 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | ***** |
| Product key | BE2322 |
| GTIN | 4055626889887 |
| Weight per piece (including packing) | 11.87 g |
| Weight per piece (excluding packing) | 11.9 g |
| Customs tariff number | 85369010 |
| Country of origin | CN |

PTV 4-TWIN-PE - Ground terminal



1088733

<https://www.phoenixcontact.com/sg/products/1088733>

Technical data

Product properties

| | |
|-----------------------|-----------------------|
| Product type | Ground terminal block |
| Product family | PTV |
| Area of application | Railway industry |
| | Machine building |
| | Plant engineering |
| | Process industry |
| Number of connections | 3 |
| Number of rows | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 1.02 W |

Connection data

| | |
|---------------------------------|-------------------|
| Number of connections per level | 3 |
| Nominal cross section | 4 mm ² |

1 level

| | |
|---|---|
| Stripping length | 9 mm ... 11 mm |
| Internal cylindrical gage | A4 |
| Connection in acc. with standard | IEC 60947-7-2 |
| Conductor cross section rigid | 0.2 mm ² ... 6 mm ² |
| Cross section AWG | 24 ... 10 (converted acc. to IEC) |
| Conductor cross section flexible | 0.2 mm ² ... 6 mm ² |
| Conductor cross section, flexible [AWG] | 24 ... 10 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.2 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.2 mm ² ... 4 mm ² |
| Nominal cross section | 4 mm ² |

1 level Connection cross sections directly pluggable

| | |
|---|--|
| Conductor cross section rigid | 0.75 mm ² ... 6 mm ² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1.5 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 1.5 mm ² ... 4 mm ² |

Ex data

Rated data (ATEX/IECEx)

| | |
|----------------|-----------------------|
| Identification | ⊕ II 2 G Ex eb IIC Gb |
|----------------|-----------------------|

PTV 4-TWIN-PE - Ground terminal



1088733

<https://www.phoenixcontact.com/sg/products/1088733>

| | |
|-----------------------------|---------------------------------|
| Operating temperature range | -60 °C ... 110 °C |
| Ex-certified accessories | 1088747 D-PTV 2,5/4-TWIN |
| | 1212587 SF-SL 0,6X3,5-100 S-VDE |
| | 3022276 CLIPFIX 35-5 |
| output | (Permanent) |

Ex connection data General

| | |
|------------------------------|---|
| Nominal cross section | 4 mm ² |
| Rated cross section AWG | 12 |
| Connection capacity rigid | 0.2 mm ² ... 6 mm ² |
| Connection capacity AWG | 24 ... 10 |
| Connection capacity flexible | 0.2 mm ² ... 6 mm ² |
| Connection capacity AWG | 24 ... 10 |

Dimensions

| | |
|--------------------|---------|
| Width | 6.2 mm |
| End cover width | 2.2 mm |
| Height | 60 mm |
| Depth | 45.7 mm |
| Depth on NS 35/7,5 | 47.2 mm |
| Depth on NS 35/15 | 54.7 mm |

Material specifications

| | |
|---|--------------|
| Color | green-yellow |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 27,5 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

PTV 4-TWIN-PE - Ground terminal



1088733

<https://www.phoenixcontact.com/sg/products/1088733>

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2018-05 |
| Spectrum | Service life test category 2, bogie-mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level | $6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$ |
| Acceleration | 3.12g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-----------------------------------|
| Pulse shape | Half-sine |
| Acceleration | 30g |
| Shock duration | 18 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

PTV 4-TWIN-PE - Ground terminal




1088733

<https://www.phoenixcontact.com/sg/products/1088733>

Drawings

Circuit diagram

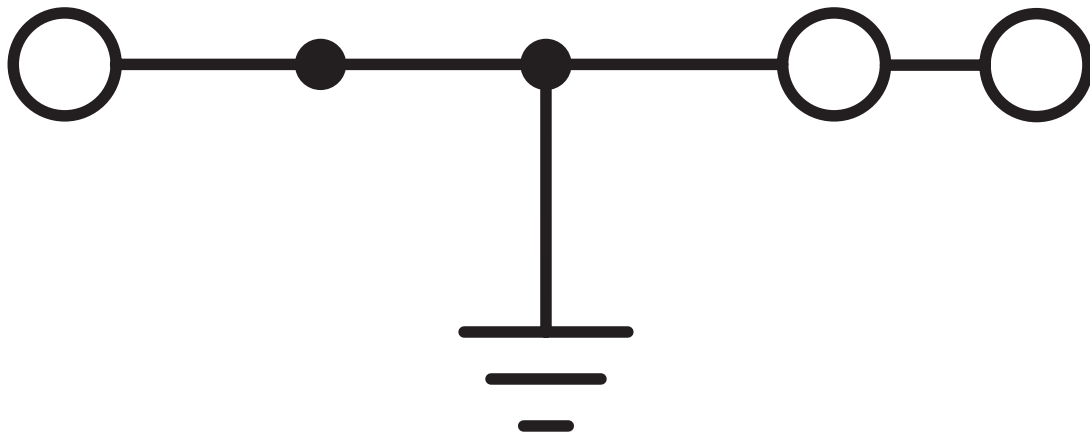

PTV 4-TWIN-PE - Ground terminal





1088733


<https://www.phoenixcontact.com/sg/products/1088733>


Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1088733>

|  CSA Approval ID: 158887 | | | | |
|---|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | - | - | 26 - 10 | - |
| Use group C | - | - | 26 - 10 | - |
| Use group D | - | - | 26 - 10 | - |

|  IECEE CB Scheme Approval ID: DE1-67153 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | - | - | - | 0.2 - 6 |

|  cULus Recognized Approval ID: E60425 | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

|  VDE approval of drawings Approval ID: 40056332 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | - | - | - | 0.2 - 6 |

|  IECEx Approval ID: IECExPTB20.0037U | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  IECEx Approval ID: IECExPTB20.0037U | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  ATEX Approval ID: PTB20ATEX1016U | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

PTV 4-TWIN-PE - Ground terminal



1088733

<https://www.phoenixcontact.com/sg/products/1088733>



CCC

Approval ID: 2021122313114374



UKCA-EX

Approval ID: CSAE 22UKEX1099U



EAC Ex

Approval ID: KZ 7500525010101950

PTV 4-TWIN-PE - Ground terminal



1088733

<https://www.phoenixcontact.com/sg/products/1088733>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141120 |
| ECLASS-13.0 | 27250103 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000901 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

PTV 4-TWIN-PE - Ground terminal



1088733

<https://www.phoenixcontact.com/sg/products/1088733>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg