

TBP 4-QUATTRO-PE - Ground terminal



1574244

<https://www.phoenixcontact.com/sg/products/1574244>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Ground terminal, number of connections: 4, connection method: Push-in connection, Rated cross section: 4 mm², cross section: 0.5 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: green-yellow



Your advantages

- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- The compact design and front connection enable wiring in a confined space

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1574244 |
| Packing unit | 50 pc |
| Minimum order quantity | 100 pc |
| Note | Made to order (non-returnable) |
| Sales key | ***** |
| Product key | BEL223 |
| GTIN | 4067923063235 |
| Weight per piece (including packing) | 14.9 g |
| Weight per piece (excluding packing) | 15.144 g |
| Country of origin | CN |

TBP 4-QUATTRO-PE - Ground terminal



1574244

<https://www.phoenixcontact.com/sg/products/1574244>

Technical data

Notes

General

| | |
|------|--|
| Note | The max. load current must not be exceeded by the total current of all connected conductors. |
|------|--|

Product properties

| | |
|-----------------------|-----------------------|
| Product type | Ground terminal block |
| Area of application | Railway industry |
| | Machine building |
| | Plant engineering |
| Number of connections | 4 |
| Number of rows | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 1.02 W |

Connection data

| | |
|---|--|
| Number of connections per level | 4 |
| Nominal cross section | 4 mm ² |
| Note | Please observe the current carrying capacity of the DIN rails. |
| Stripping length | 10 mm ... 12 mm |
| Internal cylindrical gage | A4 |
| Connection in acc. with standard | IEC 60947-7-2 |
| Conductor cross section rigid | 0.5 mm ² ... 4 mm ² |
| Cross section AWG | 20 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.5 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 20 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.5 mm ² ... 4 mm ² |
| Nominal cross section | 4 mm ² |

Connection cross sections directly pluggable

| | |
|---|---|
| Conductor cross section rigid | 0.5 mm ² ... 4 mm ² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.5 mm ² ... 4 mm ² |

Dimensions

TBP 4-QUATTRO-PE - Ground terminal



1574244

<https://www.phoenixcontact.com/sg/products/1574244>

| | |
|--------------------|---------|
| Width | 6.2 mm |
| End cover width | 2.2 mm |
| Height | 76.9 mm |
| Depth | 35.3 mm |
| Depth on NS 35/7,5 | 36.5 mm |
| Depth on NS 35/15 | 44 mm |

Material specifications

| | |
|--|--------------|
| Color | green-yellow |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2022-06 |
| Spectrum | Service life test category 2, bogie-mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level | $6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$ |
| Acceleration | 3.12g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-----------------------------------|
| Pulse shape | Half-sine |
| Acceleration | 30g |
| Shock duration | 18 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

TBP 4-QUATTRO-PE - Ground terminal



1574244

<https://www.phoenixcontact.com/sg/products/1574244>

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -50 °C ... 105 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

TBP 4-QUATTRO-PE - Ground terminal




1574244

<https://www.phoenixcontact.com/sg/products/1574244>

Drawings

Circuit diagram

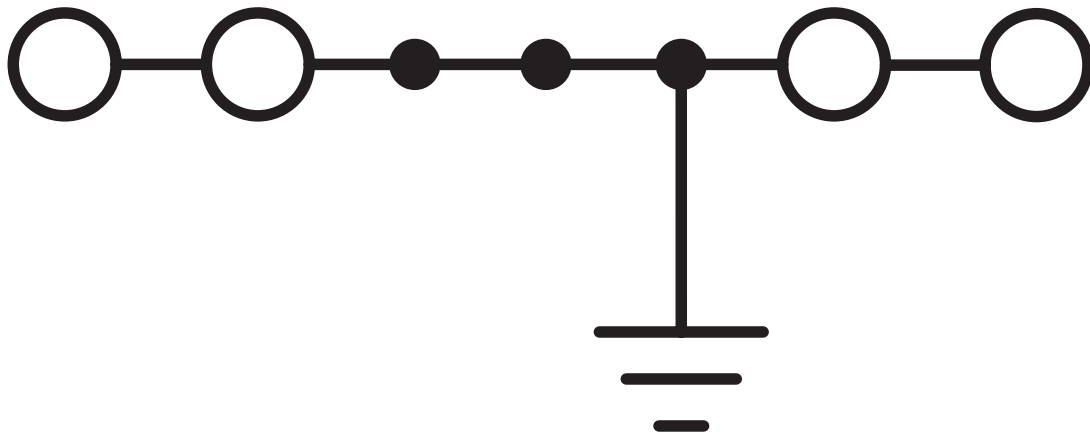

TBP 4-QUATTRO-PE - Ground terminal




1574244

<https://www.phoenixcontact.com/sg/products/1574244>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1574244>

| | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| <div> cULus Recognized Approval ID: E60425</div> | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | | | | |
| | - | - | 24 - 10 | - |
| Use group C | | | | |
| | - | - | 24 - 10 | - |

TBP 4-QUATTRO-PE - Ground terminal



1574244

<https://www.phoenixcontact.com/sg/products/1574244>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27250103 |
|-------------|----------|

TBP 4-QUATTRO-PE - Ground terminal



1574244

<https://www.phoenixcontact.com/sg/products/1574244>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg