


UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 41 A, number of connections: 2, connection method: Screw connection, Rated cross section: 6 mm², cross section: 0.2 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, color: black/yellow

Your advantages

- The large wiring space enables the connection of solid and stranded conductors without ferrules, even above the nominal cross section
- As well as saving space, the compact design enables user-friendly wiring in a small amount of space
- Optimum screwdriver guidance through closed screw shafts
- Tested for railway applications
- The cable entry funnel enables the use of conductors with ferrules and plastic collars within the nominal cross section

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 3047647 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | ***** |
| Product key | BE1111 |
| GTIN | 4046356762618 |
| Weight per piece (including packing) | 14.446 g |
| Weight per piece (excluding packing) | 14.446 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

Technical data

Product properties

| | |
|-----------------------|-----------------------------|
| Product type | Feed-through terminal block |
| Area of application | Railway industry |
| | Machine building |
| | Plant engineering |
| | Process industry |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 1.31 W |

Connection data

| | |
|---------------------------------|-------------------|
| Number of connections per level | 2 |
| Nominal cross section | 6 mm ² |
| Rated cross section AWG | 8 |

Level 1 above 1 below 1

| | |
|---|--|
| Screw thread | M4 |
| Tightening torque | 1.5 ... 1.8 Nm |
| Stripping length | 10 mm |
| Internal cylindrical gage | A5 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 0.2 mm ² ... 10 mm ² |
| Cross section AWG | 24 ... 8 (converted acc. to IEC) |
| Conductor cross section flexible | 0.2 mm ² ... 10 mm ² |
| Conductor cross section, flexible [AWG] | 24 ... 8 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.25 mm ² ... 6 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.25 mm ² ... 6 mm ² |
| 2 conductors with same cross section, solid | 0.2 mm ² ... 2.5 mm ² |
| 2 conductors with same cross section, flexible | 0.2 mm ² ... 2.5 mm ² |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.25 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 4 mm ² |
| Nominal current | 41 A |
| Maximum load current | 57 A (with 10 mm ² conductor cross section) |

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

| | |
|-----------------------|--|
| Nominal voltage | 1000 V |
| Note | Note: Product releases, connection cross sections and notes on connecting aluminum cables can be found in the download area. |
| Nominal cross section | 6 mm ² |

Ex data

Rated data (ATEX/IECEX)

| | |
|--|-------------------------------------|
| Identification | ⊕ II 2 GD Ex eb IIC Gb |
| Operating temperature range | -60 °C ... 110 °C |
| Ex-certified accessories | 3047028 D-UT 2,5/10 |
| | 3047167 ATP-UT |
| | 1205066 SZS 1,0X4,0 VDE |
| | 3022276 CLIPFIX 35-5 |
| | 3022218 CLIPFIX 35 |
| List of bridges | Plug-in bridge / FBS 2-8 / 3030284 |
| | Plug-in bridge / FBS 3-8 / 3030297 |
| | Plug-in bridge / FBS 4-8 / 3030307 |
| | Plug-in bridge / FBS 5-8 / 3030310 |
| | Plug-in bridge / FBS 10-8 / 3030323 |
| Bridge data | 39 A / 6 mm ² |
| Ex temperature increase | 40 K (44.9 A / 6 mm ²) |
| Rated voltage | 690 V |
| for bridging with bridge | 690 V |
| - At bridging between non-adjacent terminal blocks | 275 V |
| - At bridging between non-adjacent terminal blocks via PE terminal block | 176 V |
| - At cut-to-length bridging with cover | 220 V |
| - At cut-to-length bridging with partition plate | 275 V |
| Rated insulation voltage | 630 V |
| output | (Permanent) |

Ex level General

| | |
|----------------------|--------|
| Rated current | 40 A |
| Maximum load current | 50 A |
| Contact resistance | 0.2 mΩ |

Ex connection data General

| | |
|---|---|
| Torque range | 1.5 Nm ... 1.8 Nm |
| Nominal cross section | 6 mm ² |
| Rated cross section AWG | 10 |
| Connection capacity rigid | 0.2 mm ² ... 10 mm ² |
| Connection capacity AWG | 24 ... 8 |
| Connection capacity flexible | 0.2 mm ² ... 6 mm ² |
| Connection capacity AWG | 24 ... 10 |
| 2 conductors with same cross section, solid | 0.2 mm ² ... 2.5 mm ² |

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

| | |
|---|---|
| 2 conductors with the same cross-section AWG rigid | 24 ... 14 |
| 2 conductors with same cross section, stranded | 0.2 mm ² ... 2.5 mm ² |
| 2 conductors with the same cross-section AWG flexible | 24 ... 14 |

Dimensions

| | |
|--------------------|---------|
| Width | 8.2 mm |
| End cover width | 2.2 mm |
| Height | 47.7 mm |
| Depth on NS 35/7,5 | 47.5 mm |
| Depth on NS 35/15 | 55 mm |

Material specifications

| | |
|---|-------------------|
| Color | multicolored |
| | black (RAL 9005) |
| | yellow (RAL 1018) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 27,5 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions

| | |
|---|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

| | |
|--|---------------|
| Permissible humidity (storage/transport) | 30 % ... 70 % |
|--|---------------|

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

UT 6-FE - Feed-through terminal block




3047647

<https://www.phoenixcontact.com/sg/products/3047647>

Drawings

Circuit diagram

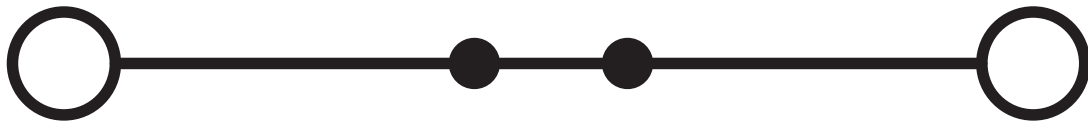

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3047647>

DNV

Approval ID: TAE00001S9



CSA

Approval ID: 13631



IECEE CB Scheme

Approval ID: DE1-63061

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 1000 V | 41 A | - | - 6 |



cULus Recognized

Approval ID: E60425



VDE Zeichengenehmigung

Approval ID: 40013658

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 1000 V | 41 A | - | 0.2 - 6 |



CSA

Approval ID: 13631



cULus Recognized

Approval ID: E60425



ATEX

Approval ID: KEMA04ATEX2048U

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| Only flexible conductors | 690 V | 40 A | - | 0.2 - 6 |
| Only rigid conductors | 690 V | 50 A | - | 0.2 - 10 |



cUL Recognized

Approval ID: E192998

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|--|-----------------------|-----------------------|-------------------|-----------------------------|

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

| | | | | |
|-------------|-------|------|--------|---|
| Use group B | 600 V | 50 A | 24 - 8 | - |
| Use group C | 600 V | 50 A | 24 - 8 | - |



EAC Ex

Approval ID: KZ 7500525010101950



IEC Ex

Approval ID: IECEx KEM 06.0027U

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--------------------------|-----------------------|-----------------------|-------------------|----------------------|
| Only flexible conductors | 690 V | 40 A | - | 0.2 - 6 |
| Only rigid conductors | 690 V | 50 A | - | 0.2 - 10 |



UL Recognized

Approval ID: E192998

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-------------|-----------------------|-----------------------|-------------------|----------------------|
| Use group B | 600 V | 50 A | 24 - 8 | - |
| Use group C | 600 V | 50 A | 24 - 8 | - |



CCC

Approval ID: 2020322313000622



UKCA-EX

Approval ID: DEKRA 21UKEX0304U

cULus Recognized

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141120 |
| ECLASS-13.0 | 27250101 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000897 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

UT 6-FE - Feed-through terminal block



3047647

<https://www.phoenixcontact.com/sg/products/3047647>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | d4ec366f-55ac-4a88-88c4-7e51da08b35d |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg