

USEN 18 N - Fuse modular terminal block



3048360

<https://www.phoenixcontact.com/sg/products/3048360>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Screw cartridge, fuse type: D 02 / E 18, nom. voltage: 400 V, nominal current: 63 A, connection method: Screw connection, Rated cross section: 35 mm², cross section: 1.5 mm²- 35 mm², mounting type: NS 35/7,5, NS 35/15, color: light gray

Your advantages

- The NEOZED® system features an impressive high current carrying capacity
- These fuse terminal blocks are designed for NEOZED® fuses

Commercial data

Item number	3048360
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	0104*
Product key	BE1235
Catalog page	Page 468 (C-1-2017)
GTIN	4017918976279
Weight per piece (including packing)	116.11 g
Weight per piece (excluding packing)	115.93 g
Customs tariff number	85363030
Country of origin	DE

USEN 18 N - Fuse modular terminal block



3048360

<https://www.phoenixcontact.com/sg/products/3048360>

Technical data

Notes

Note on application	for NEOZED fuse-links
---------------------	-----------------------

Product properties

Product type	Fuse terminal block
Pitch	27 mm
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	2

Electrical properties

Fuse type	Screw cartridge
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	4.06 W
Fuse	D 02 / E 18

Connection data

Number of connections per level	2
Nominal cross section	35 mm ²

Level 1

Screw thread	M6
Tightening torque	3.5 ... 4 Nm
Stripping length	19 mm
Internal cylindrical gage	B8
Conductor cross section rigid	1.5 mm ² ... 35 mm ²
Cross section AWG	14 ... 2 (converted acc. to IEC)
Conductor cross section flexible	1.5 mm ² ... 35 mm ²
Conductor cross section, flexible [AWG]	14 ... 2 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	1.5 mm ² ... 25 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm ² ... 25 mm ²
Cross-section with insertion bridge, rigid	25 mm ²
Cross-section with insertion bridge, flexible	25 mm ²
2 conductors with same cross section, solid	1.5 mm ² ... 10 mm ²
2 conductors with same cross section, flexible	1.5 mm ² ... 10 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	1.5 mm ² ... 10 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	1.5 mm ² ... 10 mm ²

USEN 18 N - Fuse modular terminal block



3048360

<https://www.phoenixcontact.com/sg/products/3048360>

Nominal current	63 A (the current is determined by the fuse used)
Maximum load current	63 A (with 35 mm ² conductor cross section)
Nominal voltage	400 V (the voltage is determined by the fuse used)
Nominal cross section	35 mm ²

Dimensions

Width	27 mm
Height	84 mm
Depth on NS 35/7,5	75 mm
Depth on NS 35/15	82.5 mm
Pitch	27 mm

Material specifications

Color	beige (RAL 7032)
Flammability rating according to UL 94	V2
Insulating material group	IIIa
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15

USEN 18 N - Fuse modular terminal block




3048360

<https://www.phoenixcontact.com/sg/products/3048360>

Drawings

Circuit diagram

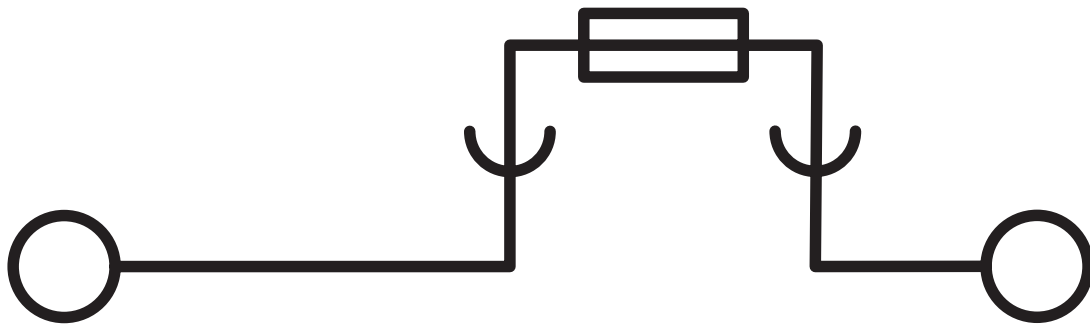

USEN 18 N - Fuse modular terminal block



3048360

<https://www.phoenixcontact.com/sg/products/3048360>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

USEN 18 N - Fuse modular terminal block



3048360

<https://www.phoenixcontact.com/sg/products/3048360>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg