

# UK 10,3-HESI N - Fuse modular terminal block



3048386

<https://www.phoenixcontact.com/sg/products/3048386>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Ceramic, fuse type: 10.3 x 38 mm, nom. voltage: 1000 V AC, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 16 mm<sup>2</sup>, cross section: 1.5 mm<sup>2</sup>- 25 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: black

## Your advantages

- Fuse holder for fuses up to 690 V AC
- For 10 x 38 fuse-links in accordance with IEC 60269-2
- Easy to bridge

## Commercial data

Item number	3048386
Packing unit	12 pc
Minimum order quantity	12 pc
Sales key	0104*
Product key	BE1234
Catalog page	Page 462 (C-1-2017)
GTIN	4017918976293
Weight per piece (including packing)	50.41 g
Weight per piece (excluding packing)	49.59 g
Customs tariff number	85369095
Country of origin	DE

# UK 10,3-HESI N - Fuse modular terminal block



3048386

<https://www.phoenixcontact.com/sg/products/3048386>

## Technical data

### Product properties

Product type	Fuse terminal block
Number of positions	1
Number of connections	2
Number of rows	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Fuse type	Ceramic
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	3 W
Fuse	10.3 x 38 mm

### Connection data

Number of connections per level	2
Nominal cross section	16 mm <sup>2</sup>
Screw thread	M5
Tightening torque	2 ... 2.5 Nm
Stripping length	11 mm
Internal cylindrical gage	A7
Connection in acc. with standard	IEC 60947-1 / -3
Conductor cross section rigid	1.5 mm <sup>2</sup> ... 25 mm <sup>2</sup>
Cross section AWG	14 ... 4 (converted acc. to IEC)
Conductor cross section flexible	1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	14 ... 6 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Cross-section with insertion bridge, rigid	10 mm <sup>2</sup>
Cross-section with insertion bridge, flexible	10 mm <sup>2</sup>
2 conductors with same cross section, solid	1.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, flexible	1.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	1.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	1.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Nominal current	32 A (the current and voltage are determined by the fuse)
Maximum load current	32 A (the current and voltage are determined by the fuse)
Nominal voltage	1000 V AC (the current and voltage are determined by the fuse)
Nominal cross section	16 mm <sup>2</sup>

# UK 10,3-HESI N - Fuse modular terminal block



3048386

<https://www.phoenixcontact.com/sg/products/3048386>

## Dimensions

Width	18 mm
Height	81 mm
Depth on NS 35/7,5	65.5 mm
Depth on NS 35/15	73 mm

## Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V2
Insulating material group	III a
Insulating material	PA
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 85 °C (max. short-term operating temperature RTI Elec. )
Ambient temperature (storage/transport)	-25 °C ... 55 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-1 / -3
----------------------------------	------------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# UK 10,3-HESI N - Fuse modular terminal block


3048386

<https://www.phoenixcontact.com/sg/products/3048386>



## Drawings

Circuit diagram

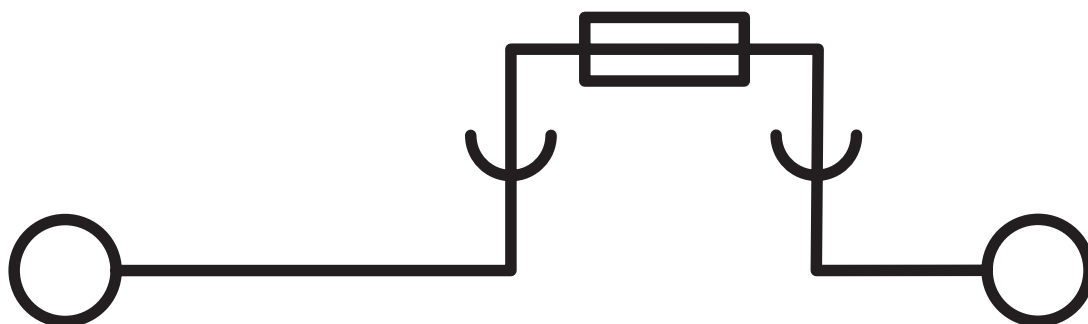

# UK 10,3-HESI N - Fuse modular terminal block





3048386


<https://www.phoenixcontact.com/sg/products/3048386>


## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3048386>

 <b>CSA</b> Approval ID: 225908				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	30 A	18 - 3	-
Multi-conductor connection	600 V	30 A	18 - 6	-

 <b>EAC</b> Approval ID: EACKZ 08593				
--	--	--	--	--

 <b>UL Listed</b> Approval ID: FILE E 244294				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	30 A	-	18 - 3
Multi-conductor connection	600 V	30 A	-	18 - 6

 <b>cUL Listed</b> Approval ID: FILE E 244294				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	30 A	18 - 3	-
Multi-conductor connection	600 V	30 A	18 - 6	-

<b>cULus Listed</b>				
---------------------	--	--	--	--

# UK 10,3-HESI N - Fuse modular terminal block



3048386

<https://www.phoenixcontact.com/sg/products/3048386>

## Classifications

### ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

### ETIM

ETIM 9.0	EC000899
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UK 10,3-HESI N - Fuse modular terminal block



3048386

<https://www.phoenixcontact.com/sg/products/3048386>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

[marketing@phoenixcontact.com.sg](mailto:marketing@phoenixcontact.com.sg)