

UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, With test socket screws for insertion of test plugs, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 24 V, nominal current: 6.3 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.14 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 3046540 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | 0185* |
| Product key | BE1134 |
| GTIN | 4046356148092 |
| Weight per piece (including packing) | 17.416 g |
| Weight per piece (excluding packing) | 17.416 g |
| Customs tariff number | 85369095 |
| Country of origin | DE |

UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Technical data

Product properties

| | |
|-----------------------|---------------------|
| Product type | Fuse terminal block |
| Number of positions | 1 |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--|
| Fuse type | Glass / ceramics / ... |
| Rated surge voltage | 4 kV |
| Maximum power dissipation for nominal condition | 1.02 W |
| Fuse | G / 5 x 20 |
| LED voltage range | 12 V AC/DC ... 30 V AC/DC |
| Current LED | 6.3 A |
| Maximum current with single arrangement | 6.3 A |
| LED current range | 0.31 mA ... 0.95 mA |
| Maximum power dissipation | max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload) |
| | max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload) |
| | max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit) |
| | max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit) |

Input data

| | |
|-------------------|---------------------------|
| LED voltage range | 12 V AC/DC ... 30 V AC/DC |
|-------------------|---------------------------|

Connection data

| | |
|----------------------------------|--|
| Number of connections per level | 2 |
| Nominal cross section | 4 mm ² |
| Screw thread | M3 |
| Tightening torque | 0.6 ... 0.8 Nm |
| Stripping length | 9 mm |
| Internal cylindrical gage | A4 |
| Connection in acc. with standard | IEC 60947-7-3 |
| Conductor cross section rigid | 0.14 mm ² ... 6 mm ² |
| Cross section AWG | 26 ... 10 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 6 mm ² |

UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

| | |
|---|--|
| Conductor cross section, flexible [AWG] | 26 ... 10 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.25 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 4 mm ² |
| 2 conductors with same cross section, solid | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1.5 mm ² |
| Nominal current | 6.3 A |
| Maximum load current | 6.3 A (the current is determined by the fuse used) |
| Nominal voltage | 24 V |
| Nominal cross section | 4 mm ² |

Dimensions

| | |
|--------------------|---------|
| Width | 6.2 mm |
| Height | 57.8 mm |
| Depth on NS 35/7,5 | 73 mm |
| Depth on NS 35/15 | 80.5 mm |

Material specifications

| | |
|---|------------------|
| Color | black (RAL 9005) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 27,5 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Environmental and real-life conditions

Ambient conditions

UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

UT 4-HESILED 24-P/P - Fuse modular terminal block




3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Drawings

Application drawing

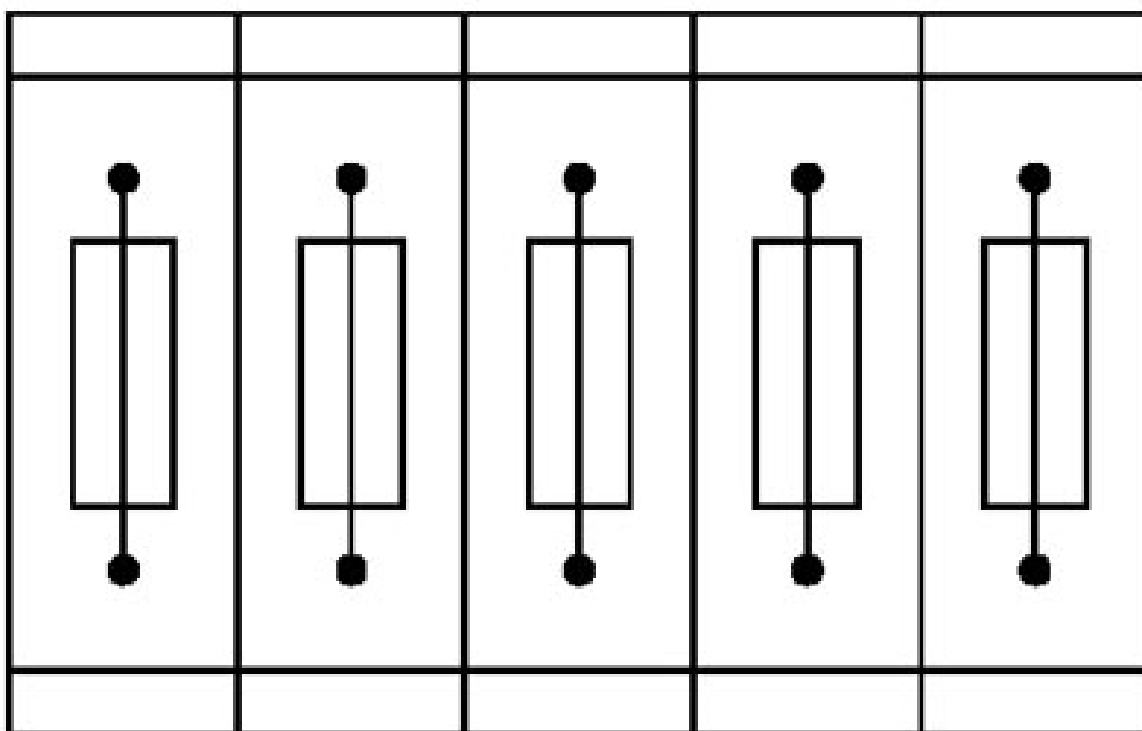

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks


UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Application drawing

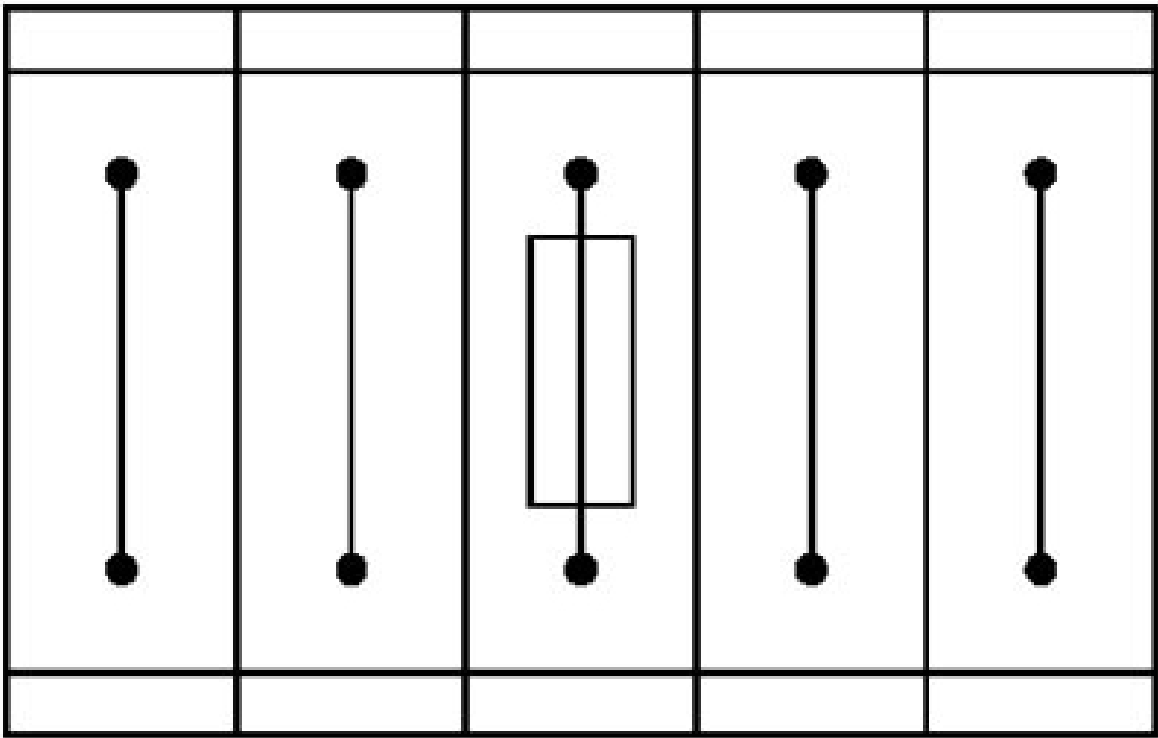


Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Circuit diagram

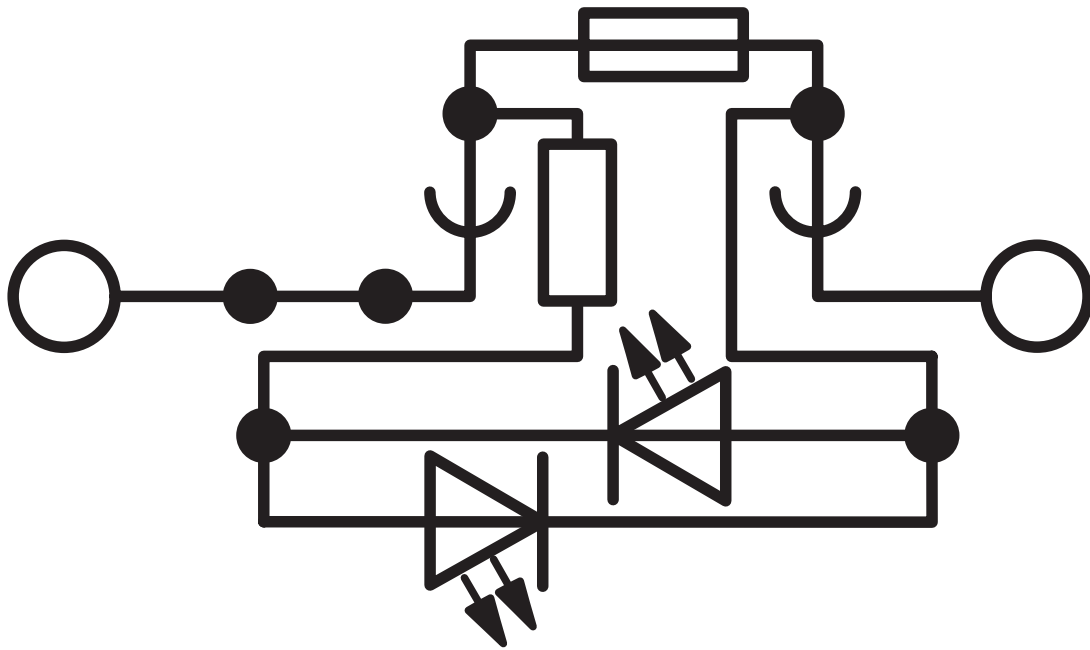

UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3046540>

DNV

Approval ID: TAE00001S9



CSA

Approval ID: 158887

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-------------|-----------------------|-----------------------|-------------------|-----------------------------|
| Use group B | | | | |
| | 600 V | 6.3 A | 26 - 10 | - |
| Use group C | | | | |
| | 600 V | 6.3 A | 26 - 10 | - |



EAC

Approval ID: EACKZ 08593

UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141116 |
| ECLASS-12.0 | 27141116 |
| ECLASS-13.0 | 27250113 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000899 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

UT 4-HESILED 24-P/P - Fuse modular terminal block



3046540

<https://www.phoenixcontact.com/sg/products/3046540>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | e2e748a1-dbe0-460d-879f-8d5939b8abbd |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg