

UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/sg/products/1954016>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 500 V, nominal current: 29 A, 1st level connection left, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.2 mm² - 4 mm², connection method: Spade connection, mounting: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- The slotted plugs enable one fully insulated or two bare 2.8 mm slip-on sleeves to be slid on in place of one 6.3 mm slip-on sleeve
- The housing panels only protrude slightly beyond the metal parts because it is assumed that fully-insulated slip-on sleeves are connected
- The front slip-on plug-in connection is the ideal wiring design for applications where space is limited and cable ducts need to be moved close to the terminal strip

Commercial data

Item number	1954016
Packing unit	50 pc
Minimum order quantity	1 pc
Sales key	0100*
Product key	BE511X
Catalog page	Page 534 (C-1-2019)
GTIN	4017918052560
Weight per piece (including packing)	12.778 g
Weight per piece (excluding packing)	12.778 g
Customs tariff number	85369010
Country of origin	PL

UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/sg/products/1954016>

Technical data

Product properties

Product type	Feed-through terminal block
Product family	UVKB
Number of connections	4
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W

Connection data

Number of connections per level	4
Nominal cross section	4 mm ²

1st level connection left

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	8 mm
Internal cylindrical gage	A3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, rigid	4 mm ²
Cross-section with insertion bridge, flexible	4 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 2.5 mm ²
Nominal current	29 A
Maximum load current	29 A (with 4 mm ² conductor cross section)
Nominal voltage	500 V (voltage data for slip-on connections in acc. with EN 61210 are also dependent on nominal size, material, insulation of the sleeve and conductor cross section.)

UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/sg/products/1954016>

Nominal cross section	4 mm²
-----------------------	-------

Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	68 mm
Depth on NS 32	49 mm
Depth on NS 35/7,5	44 mm
Depth on NS 35/15	51.5 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/sg/products/1954016>

Drawings

Circuit diagram




UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/sg/products/1954016>

Circuit diagram

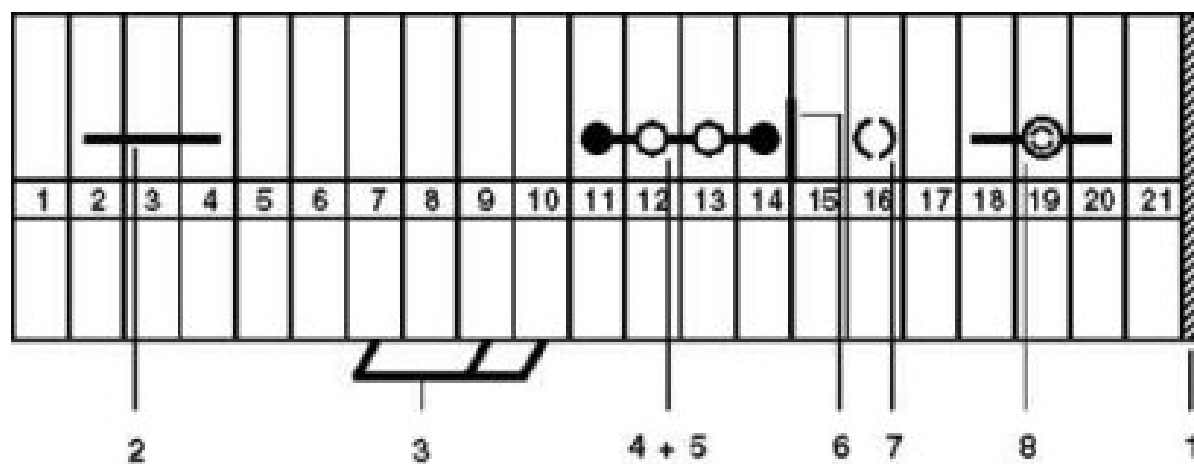

- 1 = cover
- 2 = fixed bridge
- 3 = insertion bridge
- 4 = isolator bridge bar
- 5 = bridge bar isolator
- 6 = separating plate
- 7 = partition plate
- 8 = test plug socket

UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/sg/products/1954016>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1954016>

DNV

Approval ID: TAE00001CT

UL Recognized Approval ID: E60425				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group C				
	300 V	25 A	28 - 12	-

EAC

Approval ID: RU C-DE.BL08.B.00541

UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/sg/products/1954016>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/sg/products/1954016>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg