

PTTB 2,5-DIO.1N5408K/U-O - Component terminal block



1556590

<https://www.phoenixcontact.com/sg/products/1556590>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Your advantages

- The compact design and front connection enable wiring in a confined space
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off

Commercial data

Item number	1556590
Packing unit	50 pc
Minimum order quantity	50 pc
Product key	BE2272
GTIN	4067923035096
Weight per piece (including packing)	10.2 g
Weight per piece (excluding packing)	10.2 g
Country of origin	CN

PTTB 2,5-DIO.1N5408K/U-O - Component terminal block



1556590

<https://www.phoenixcontact.com/sg/products/1556590>

Technical data

Notes

General	The max. current is determined by the diode. Installed: diode 1N 5408, reverse voltage: 1000 V, maximum continuous current: 1.5 A
---------	---

Product properties

Product type	Component terminal block
Number of connections	4
Number of rows	2

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²
Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A4
	B3
Connection in acc. with standard	IEC 60947-7-1 (in compliance)
Conductor cross section rigid	0.14 mm ² ... 4 mm ²
Cross section AWG	26 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	26 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Nominal current	1.5 A
Maximum load current	1.5 A
Nominal voltage	500 V
Nominal cross section	2.5 mm ²
Component type	Diode 1N 5408K
Reverse voltage	1000 V

Connection cross sections directly pluggable

Conductor cross section rigid	0.34 mm ² ... 4 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.34 mm ² ... 2.5 mm ²

PTTB 2,5-DIO.1N5408K/U-O - Component terminal block



1556590

<https://www.phoenixcontact.com/sg/products/1556590>

Dimensions

Width	5.2 mm
End cover width	2.2 mm
Height	68 mm
Depth	45.8 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1 (in compliance)
----------------------------------	-------------------------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

PTTB 2,5-DIO.1N5408K/U-O - Component terminal block




1556590

<https://www.phoenixcontact.com/sg/products/1556590>

Drawings

Circuit diagram

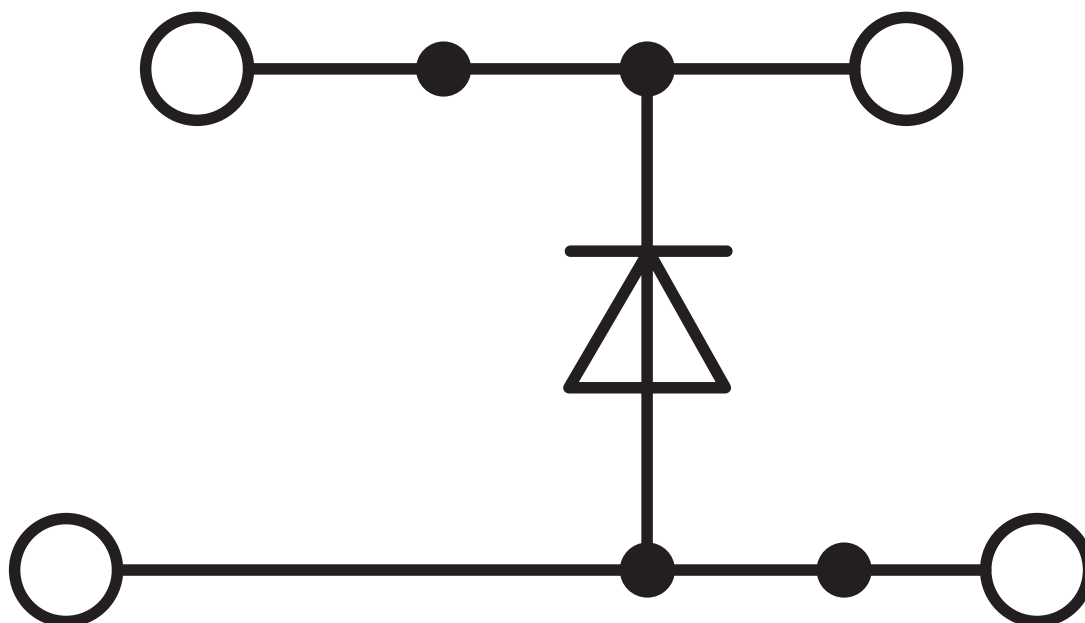

PTTB 2,5-DIO.1N5408K/U-O - Component terminal block




1556590

<https://www.phoenixcontact.com/sg/products/1556590>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1556590>

 CSA Approval ID: 2030668				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	300 V	20 A	26 - 12	-
Current determined by the diode	300 V	1.5 A	26 - 12	-
Use group C				
	300 V	20 A	26 - 12	-
Current determined by the diode	300 V	1.5 A	26 - 12	-

 cULus Recognized Approval ID: E60425	
--	--

PTTB 2,5-DIO.1N5408K/U-O - Component terminal block



1556590
<https://www.phoenixcontact.com/sg/products/1556590>

Classifications

ECLASS

ECLASS-13.0	27250114
-------------	----------

ETIM

ETIM 9.0	EC000903
----------	----------

PTTB 2,5-DIO.1N5408K/U-O - Component terminal block



1556590

<https://www.phoenixcontact.com/sg/products/1556590>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg