

USK 4-FSR(4-2,8-0,8) - Feed-through terminal block



0270018

<https://www.phoenixcontact.com/sg/products/0270018>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 800 V, nominal current: 32 A, 1st level connection left, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.2 mm² - 4 mm², connection method: Spade connection, mounting: NS 35/7,5, NS 35/15, color: gray

Commercial data

Item number	0270018
Packing unit	50 pc
Minimum order quantity	1 pc
Sales key	0100*
Product key	BE511X
Catalog page	Page 537 (C-1-2019)
GTIN	4017918000103
Weight per piece (including packing)	7.725 g
Weight per piece (excluding packing)	7.62 g
Customs tariff number	85369010
Country of origin	PL

USK 4-FSR(4-2,8-0,8) - Feed-through terminal block



0270018

<https://www.phoenixcontact.com/sg/products/0270018>

Technical data

Product properties

Product type	Feed-through terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.02 W

Connection data

Number of connections per level	2
Nominal cross section	4 mm ²

1st level connection left

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	9 mm
Internal cylindrical gage	A3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, rigid	2.5 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 2.5 mm ²
Nominal current	32 A
Maximum load current	32 A (with 4 mm ² conductor cross section)
Nominal voltage	800 V
Nominal cross section	4 mm ²

Dimensions

USK 4-FSR(4-2,8-0,8) - Feed-through terminal block



0270018

<https://www.phoenixcontact.com/sg/products/0270018>

Width	6.2 mm
End cover width	1.3 mm
Height	42.5 mm
Depth on NS 32	50.5 mm
Depth on NS 35/7,5	45.5 mm
Depth on NS 35/15	53 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Optimum ambient temperature (storage/transport)	-25 °C ... 55 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (operation)	-60 °C ... 85 °C
Ambient temperature (storage/transport)	-25 °C ... 55 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15

USK 4-FSR(4-2,8-0,8) - Feed-through terminal block


0270018

<https://www.phoenixcontact.com/sg/products/0270018>



Drawings

Circuit diagram


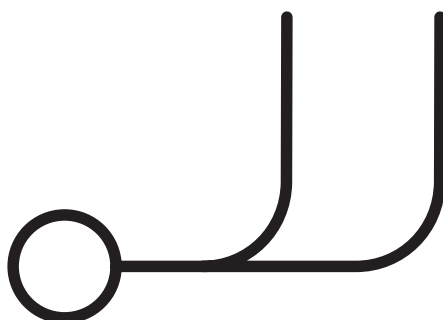


USK 4-FSR(4-2,8-0,8) - Feed-through terminal block

0270018

<https://www.phoenixcontact.com/sg/products/0270018>

Circuit diagram

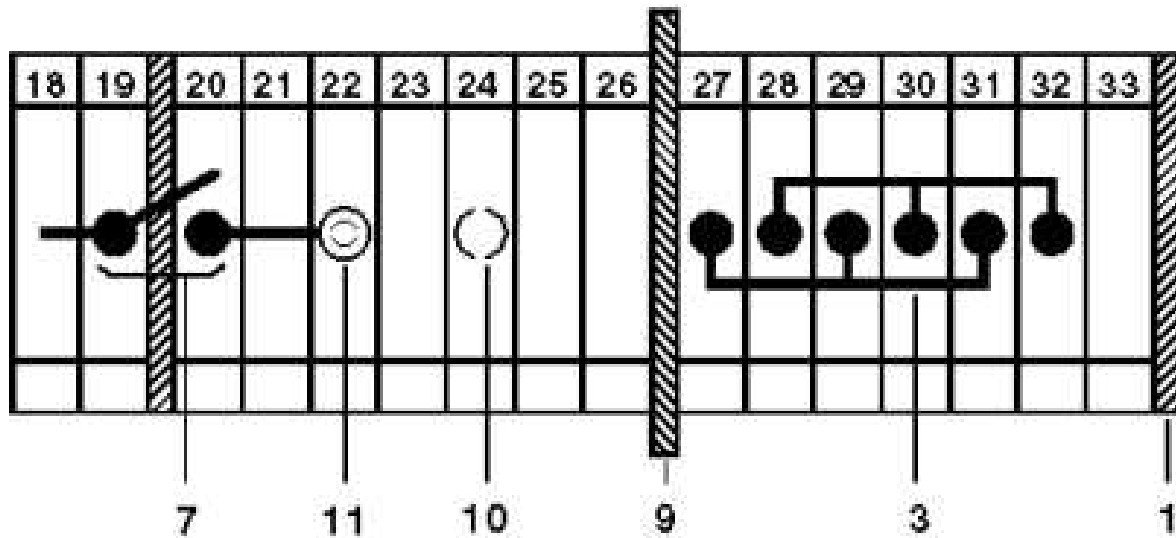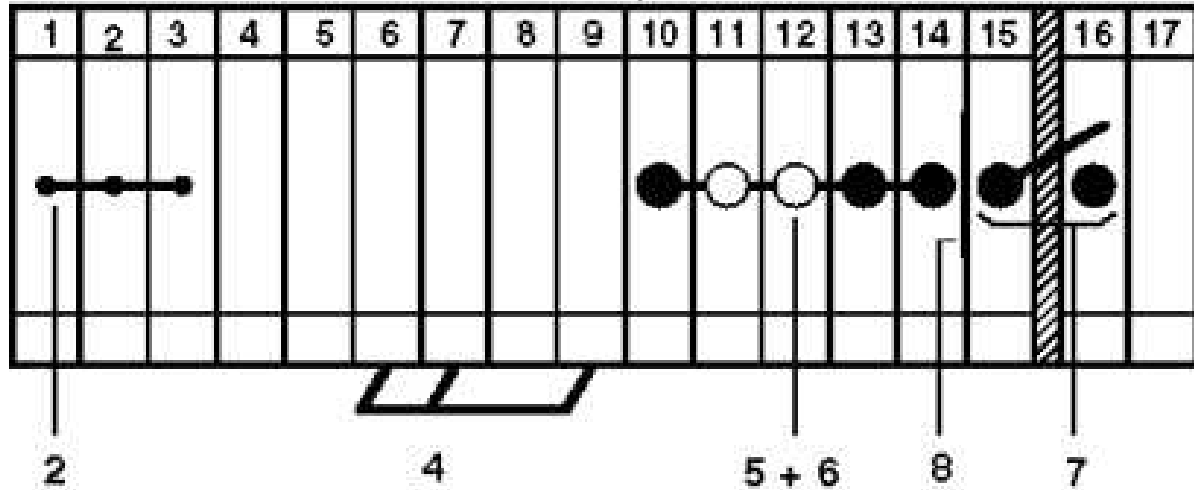

- 1 = Cover
- 2 = Fixed bridge
- 3 = L-bridge
- 4 = Insertion bridge
- 5 = Isolator bridge bar
- 6 = Isolator bridge
- 7 = Bridge bar for 2 terminal blocks
- 8 = Insulation plate
- 9 = Partition plate
- 10 = Test socket, for test pick-off with MPS test plug or RPS reducing plug
- 11 = Test socket, insulated, can only be used with FBI, ISSBI

USK 4-FSR(4-2,8-0,8) - Feed-through terminal block



0270018

<https://www.phoenixcontact.com/sg/products/0270018>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/0270018>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	20 A	28 - 12	-

 EAC Approval ID: RU C-DE.BL08.B.00541				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	600 V	20 A	28 - 12	-
Use group C				
	600 V	20 A	28 - 12	-
Use group F				
	800 V	20 A	28 - 12	-

USK 4-FSR(4-2,8-0,8) - Feed-through terminal block



0270018

<https://www.phoenixcontact.com/sg/products/0270018>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

USK 4-FSR(4-2,8-0,8) - Feed-through terminal block



0270018

<https://www.phoenixcontact.com/sg/products/0270018>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg