

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block



3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 60 V, nominal current: 6.3 A, connection method: Push-in connection, 1 level, Rated cross section: 1 mm², cross section: 0.2 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- The compact design and front connection enable wiring in a confined space
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 3270205 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Note | Made to order (non-returnable) |
| Sales key | ***** |
| Product key | BE2234 |
| Catalog page | Page 101 (C-1-2019) |
| GTIN | 4055626045481 |
| Weight per piece (including packing) | 12.516 g |
| Weight per piece (excluding packing) | 10.6 g |
| Customs tariff number | 85369095 |
| Country of origin | CN |

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block



3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Technical data

Notes

| | |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| General | The current is determined by the fuse used, the voltage by the selected LED. If the fuse is faulty, the downstream circuit will not be disconnected. |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|

Product properties

| | |
|-----------------------|---------------------|
| Product type | Fuse terminal block |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fuse type | Glass / ceramics / ... |
| Rated surge voltage | 4 kV |
| Maximum power dissipation for nominal condition | 1.02 W |
| Fuse | G / 5 x 20 |
| LED voltage range | 30 V AC/DC ... 60 V AC/DC |
| LED current range | 0.4 mA ... 0.86 mA |
| Maximum power dissipation | max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload) max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload) max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit) max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit) |

Input data

| | |
|-------------------|---------------------------|
| LED voltage range | 30 V AC/DC ... 60 V AC/DC |
|-------------------|---------------------------|

Connection data

| | |
|---------------------------------|-------------------|
| Number of connections per level | 2 |
| Nominal cross section | 4 mm ² |

1 level

| | |
|----------------------------------|-------------------------------------------|
| Stripping length | 10 mm ... 12 mm |
| Internal cylindrical gage | A4 |
| Connection in acc. with standard | IEC 60947-7-3 |
| Conductor cross section rigid | 0.2 mm ² ... 6 mm ² |
| Cross section AWG | 24 ... 10 (converted acc. to IEC) |

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block



3270205

<https://www.phoenixcontact.com/sg/products/3270205>

| | |
|-------------------------------------------------------------------------------------------|----------------------------------------------------|
| Conductor cross section flexible | 0.2 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 24 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.25 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.25 mm ² ... 4 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1 mm ² |
| Nominal current | 6.3 A |
| Maximum load current | 6.3 A (the current is determined by the fuse used) |
| Nominal voltage | 60 V |
| Nominal cross section | 1 mm ² |

1 level Connection cross sections directly pluggable

| | |
|-------------------------------------------------------------------|-------------------------------------------|
| Conductor cross section rigid | 0.5 mm ² ... 6 mm ² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.5 mm ² ... 4 mm ² |

Dimensions

| | |
|--------------------|---------|
| Width | 8.2 mm |
| End cover width | 2.2 mm |
| Height | 67.8 mm |
| Depth | 35.3 mm |
| Depth on NS 35/7,5 | 42.8 mm |
| Depth on NS 35/15 | 50.3 mm |

Material specifications

| | |
|-------------------------------------------------------------------------|------------------|
| Color | black (RAL 9005) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block



3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Environmental and real-life conditions

Ambient conditions

| | |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |


PTC 4-HESILED 60 (5X20) - Fuse modular terminal block

3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Drawings

Application drawing

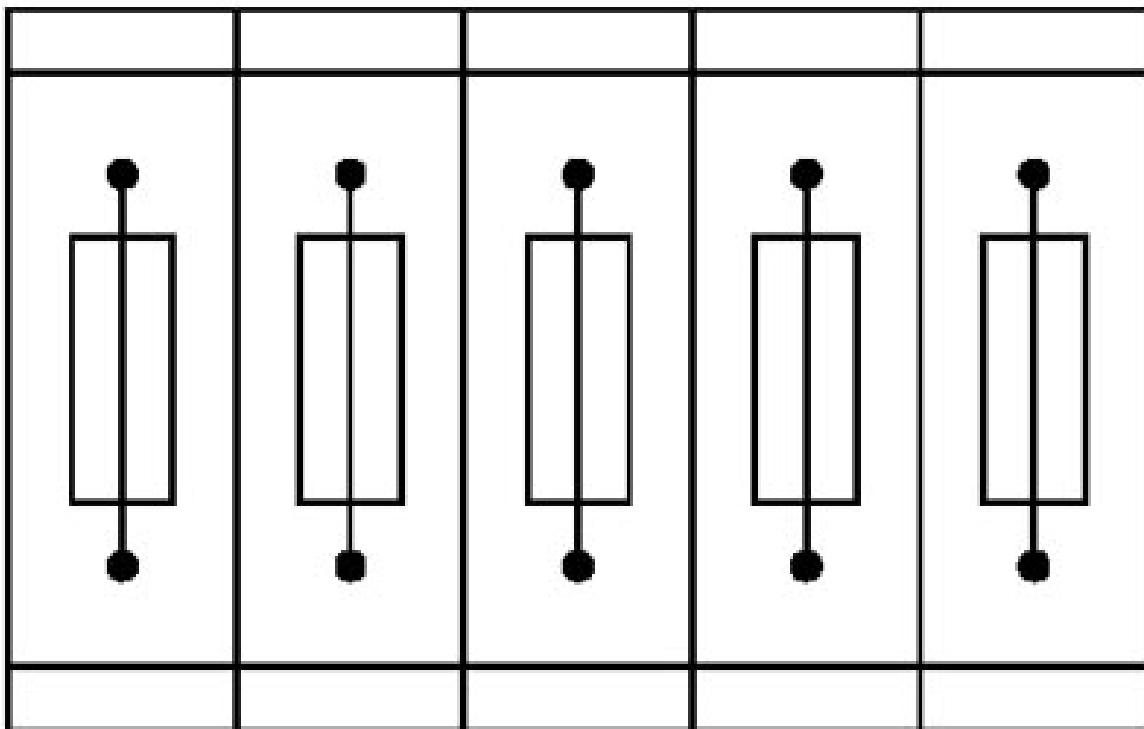


Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block

3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Application drawing

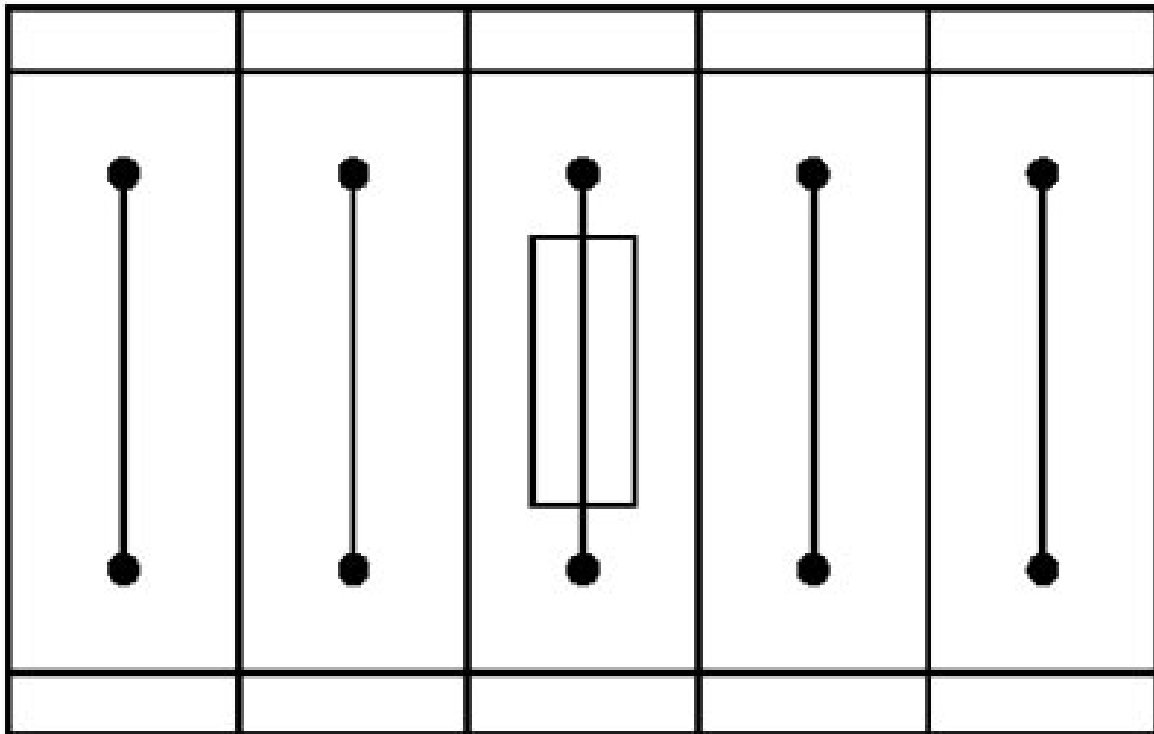


Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block

3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Circuit diagram

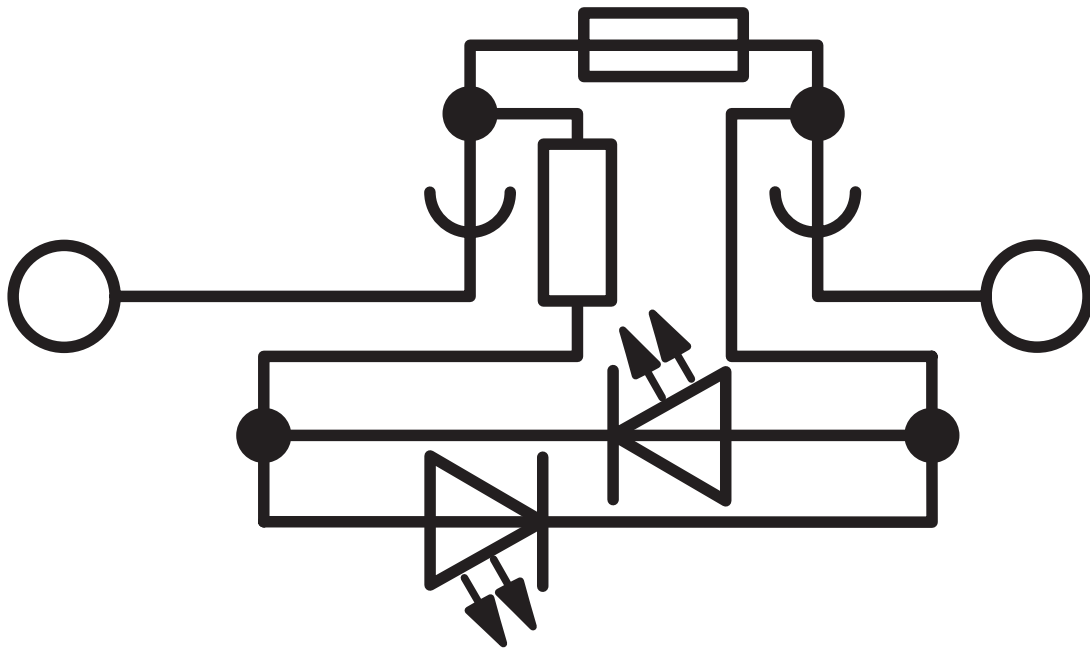

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block





3270205


<https://www.phoenixcontact.com/sg/products/3270205>


Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3270205>

|  CSA Approval ID: 13631 | | | | |
|--------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 300 V | 6.3 A | 24 - 10 | - |
| Use group C | 300 V | 6.3 A | 24 - 10 | - |

|  EAC Approval ID: RU C-DE.BL08.B.00644 | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block



3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141116 |
| ECLASS-12.0 | 27141116 |
| ECLASS-13.0 | 27250113 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000899 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

PTC 4-HESILED 60 (5X20) - Fuse modular terminal block



3270205

<https://www.phoenixcontact.com/sg/products/3270205>

Environmental product compliance

EU RoHS

| | |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|-----------------------------------------|--------------------|

China RoHS

| | |
|----------------------------------------|------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg