


STTB 2,5-2DIO/O-UL/O-UR - Component terminal block



3031597

<https://www.phoenixcontact.com/sg/products/3031597>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Component terminal block, with integrated diode, nom. voltage: 250 V, nominal current: 0.5 A, 1st and 2nd level, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², mounting: NS 35/7,5, NS 35/15, color: gray

Your advantages

- For more versions and versions for soldering in components yourself, visit [phoenixcontact.com/products](https://www.phoenixcontact.com/products)
- Double-level diode and LED terminal blocks perform a wide range of switching tasks

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3031597 |
| Packing unit | 50 pc |
| Minimum order quantity | 1 pc |
| Sales key | 0164* |
| Product key | BE2172 |
| Catalog page | Page 219 (C-1-2019) |
| GTIN | 4017918183059 |
| Weight per piece (including packing) | 10.82 g |
| Weight per piece (excluding packing) | 9.7 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |

STTB 2,5-2DIO/O-UL/O-UR - Component terminal block



3031597

<https://www.phoenixcontact.com/sg/products/3031597>

Technical data

Product properties

| | |
|-----------------------|--------------------------|
| Product type | Component terminal block |
| Number of connections | 4 |
| Number of rows | 2 |
| Potentials | 2 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 4 kV |
| Maximum power dissipation for nominal condition | 0.77 W |

Connection data

| | |
|---------------------------------|---------------------|
| Number of connections per level | 2 |
| Nominal cross section | 2.5 mm ² |

1st and 2nd level

| | |
|---|--|
| Stripping length | 8 mm ... 10 mm |
| Internal cylindrical gage | A3 |
| Conductor cross section rigid | 0.08 mm ² ... 4 mm ² |
| Cross section AWG | 28 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.08 mm ² ... 2.5 mm ² |
| Conductor cross section, flexible [AWG] | 28 ... 14 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² |
| Nominal current | 0.5 A |
| Maximum load current | 0.5 A |
| Nominal voltage | 250 V |
| Nominal cross section | 2.5 mm ² |

Dimensions

| | |
|--------------------|---------|
| Width | 5.2 mm |
| End cover width | 2.2 mm |
| Height | 67.5 mm |
| Depth on NS 35/7,5 | 47.5 mm |
| Depth on NS 35/15 | 55 mm |

Material specifications

| | |
|-------|-----------------|
| Color | gray (RAL 7042) |
|-------|-----------------|

STTB 2,5-2DIO/O-UL/O-UR - Component terminal block



3031597

<https://www.phoenixcontact.com/sg/products/3031597>

| | |
|---|-------------|
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 27,5 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |


STTB 2,5-2DIO/O-UL/O-UR - Component terminal block

3031597

<https://www.phoenixcontact.com/sg/products/3031597>

Drawings

Circuit diagram

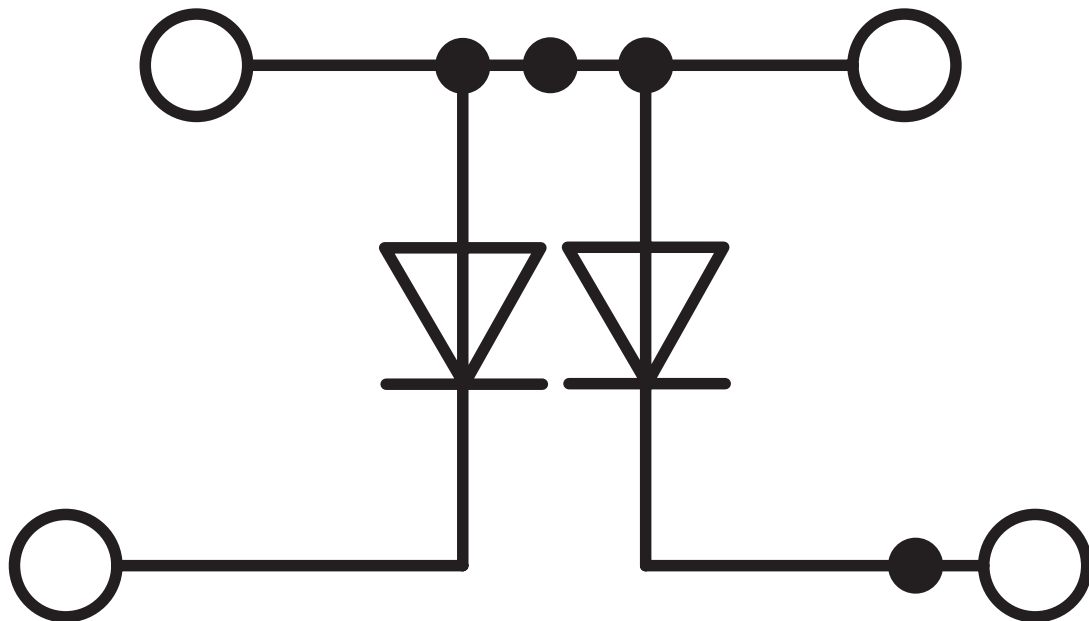

STTB 2,5-2DIO/O-UL/O-UR - Component terminal block




3031597


<https://www.phoenixcontact.com/sg/products/3031597>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3031597>

|  CSA Approval ID: 13631 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | | | | |
| | 300 V | 0.5 A | 28 - 12 | - |
| Use group C | | | | |
| | 300 V | 0.5 A | 28 - 12 | - |

|  EAC Approval ID: RU C-DE.BL08.B.00644 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | | | | |
| | 300 V | 0.5 A | 28 - 12 | - |
| Use group C | | | | |
| | 300 V | 0.5 A | 28 - 12 | - |

STTB 2,5-2DIO/O-UL/O-UR - Component terminal block



3031597

<https://www.phoenixcontact.com/sg/products/3031597>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141127 |
| ECLASS-12.0 | 27141127 |
| ECLASS-13.0 | 27250114 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000903 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

STTB 2,5-2DIO/O-UL/O-UR - Component terminal block



3031597

<https://www.phoenixcontact.com/sg/products/3031597>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 26784f90-d8a9-4495-9645-cffc0e5e4f7a |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg