

# TB 240 I BU - Feed-through terminal block



3251205

<https://www.phoenixcontact.com/sg/products/3251205>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 415 A, number of connections: 2, connection method: Screw connection, Rated cross section: 240 mm<sup>2</sup>, cross section: 70 mm<sup>2</sup> - 240 mm<sup>2</sup>, mounting type: NS 35/15, NS 32, color: blue

## Your advantages

- Reliable cable connection is ensured by three-point centering of the conductor in the prismatic sleeve base
- Low contact resistance of the contact surface due to ribbing
- Screw locking by means of spring-loaded elements in the clamping part

## Commercial data

Item number	3251205
Packing unit	2 pc
Minimum order quantity	2 pc
Sales key	*****
Product key	BEK311
GTIN	4046356951111
Weight per piece (including packing)	485 g
Weight per piece (excluding packing)	485 g
Customs tariff number	85369010
Country of origin	IN

# TB 240 I BU - Feed-through terminal block



3251205

<https://www.phoenixcontact.com/sg/products/3251205>

## Technical data

### Product properties

Product type	High current terminal block
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	13.78 W

### Connection data


Number of connections per level	2
Nominal cross section	240 mm <sup>2</sup>
Screw thread	M10
Note	Screws with hexagonal socket
Tightening torque	25 ... 30 Nm
Stripping length	40 mm
Internal cylindrical gage	B15
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	70 mm <sup>2</sup> ... 240 mm <sup>2</sup>
Cross section AWG	3/0 ... 250 kcmil (converted acc. to IEC)
Conductor cross section flexible	70 mm <sup>2</sup> ... 240 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	3/0 ... 350 kcmil (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	70 mm <sup>2</sup> ... 185 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	70 mm <sup>2</sup> ... 185 mm <sup>2</sup>
Cross-section with insertion bridge, rigid	240 mm <sup>2</sup>
Cross-section with insertion bridge, flexible	185 mm <sup>2</sup>
2 conductors with same cross section, solid	35 mm <sup>2</sup> ... 95 mm <sup>2</sup>
2 conductors with same cross section, flexible	50 mm <sup>2</sup> ... 95 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	35 mm <sup>2</sup> ... 50 mm <sup>2</sup>
Nominal current	415 A
Maximum load current	415 A (with 240 mm <sup>2</sup> conductor cross section)
Nominal voltage	1000 V
Nominal cross section	240 mm <sup>2</sup>

### Dimensions

# TB 240 I BU - Feed-through terminal block

3251205

<https://www.phoenixcontact.com/sg/products/3251205>

Dimensional drawing	
Width	36 mm
Height	100 mm
Depth	123.6 mm
Depth on NS 32	129 mm
Depth on NS 35/15	131.5 mm

## Material specifications

Color	blue (RAL 5015)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

### Temperature-rise test

Requirement temperature-rise test	Increase in temperature $\leq$ 45 K
Result	Test passed
Short-time withstand current 240 mm <sup>2</sup>	28.8 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	2.2 kV
Result	Test passed

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	20 N
Result	Test passed

### Test for conductor damage and slacking

Rotation speed	10 (+/- 2) rpm
Revolutions	135
Conductor cross section/weight	70 mm <sup>2</sup> /10.4 kg 240 mm <sup>2</sup> /20.0 kg
Result	Test passed

## Environmental and real-life conditions

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Long life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C

# TB 240 I BU - Feed-through terminal block



3251205

<https://www.phoenixcontact.com/sg/products/3251205>

Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/15
	NS 32

# TB 240 I BU - Feed-through terminal block


3251205

<https://www.phoenixcontact.com/sg/products/3251205>



## Drawings

Dimensional drawing

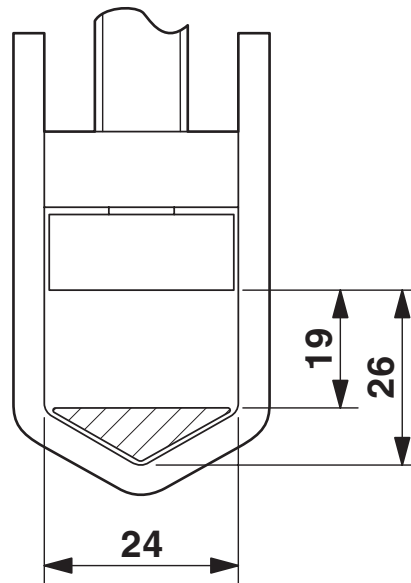

Circuit diagram



# TB 240 I BU - Feed-through terminal block



3251205

<https://www.phoenixcontact.com/sg/products/3251205>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3251205>



**EAC**

Approval ID: EACKZ 08593

# TB 240 I BU - Feed-through terminal block



3251205

<https://www.phoenixcontact.com/sg/products/3251205>

## Classifications

### ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

### ETIM

ETIM 9.0	EC000897
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# TB 240 I BU - Feed-through terminal block



3251205

<https://www.phoenixcontact.com/sg/products/3251205>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.  
105 Eunos Avenue 3, #04-00  
Singapore 409836  
+65 6228 4900  
[marketing@phoenixcontact.com.sg](mailto:marketing@phoenixcontact.com.sg)