

TB 95 I BU - Feed-through terminal block



3251203

<https://www.phoenixcontact.com/sg/products/3251203>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 232 A, number of connections: 2, connection method: Screw connection, Rated cross section: 95 mm², cross section: 25 mm² - 95 mm², mounting type: NS 35/15, NS 32, color: blue

Your advantages

- Reliable cable connection is ensured by three-point centering of the conductor in the prismatic sleeve base
- Low contact resistance of the contact surface due to ribbing
- Screw locking by means of spring-loaded elements in the clamping part

Commercial data

Item number	3251203
Packing unit	3 pc
Minimum order quantity	3 pc
Note	Made to order (non-returnable)
Sales key	*****
Product key	BEK311
GTIN	4046356951098
Weight per piece (including packing)	229.3 g
Weight per piece (excluding packing)	213.26 g
Customs tariff number	85369010
Country of origin	IN

TB 95 I BU - Feed-through terminal block



3251203

<https://www.phoenixcontact.com/sg/products/3251203>

Technical data

Product properties

Product type	High current terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	7.54 W

Connection data

Number of connections per level	2
Nominal cross section	95 mm ²
Rated cross section AWG	4/0
Screw thread	M8
Note	Screws with hexagonal socket
Tightening torque	15 ... 20 Nm
Stripping length	33 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	25 mm ² ... 95 mm ²
Cross section AWG	2 ... 3/0 (converted acc. to IEC)
Conductor cross section flexible	35 mm ² ... 95 mm ²
Conductor cross section, flexible [AWG]	1/0 ... 3/0 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	35 mm ² ... 95 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	35 mm ² ... 95 mm ²
Cross-section with insertion bridge, rigid	95 mm ²
Cross-section with insertion bridge, flexible	70 mm ²
2 conductors with same cross section, solid	25 mm ² ... 35 mm ²
2 conductors with the same cross-section AWG rigid	3 ... 2 (converted acc. to IEC)
2 conductors with same cross section, flexible	25 mm ² ... 35 mm ²
2 conductors with the same cross-section AWG flexible	3 ... 2 (converted acc. to IEC)
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	16 mm ² ... 35 mm ²
Nominal current	232 A
Maximum load current	232 A
Nominal voltage	1000 V
Nominal cross section	95 mm ²


TB 95 I BU - Feed-through terminal block



3251203

<https://www.phoenixcontact.com/sg/products/3251203>

Dimensions

Dimensional drawing	
Width	25 mm
Height	82.8 mm
Depth	90 mm
Depth on NS 32	95.5 mm
Depth on NS 35/15	97.6 mm

Material specifications

Color	blue (RAL 5015)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/15
	NS 32


TB 95 I BU - Feed-through terminal block

3251203

<https://www.phoenixcontact.com/sg/products/3251203>

Drawings

Dimensional drawing

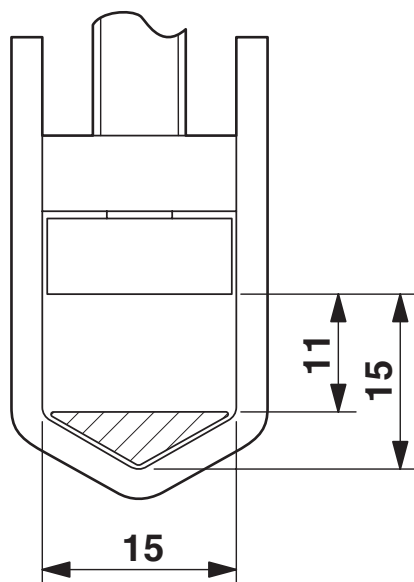

Circuit diagram



TB 95 I BU - Feed-through terminal block



3251203

<https://www.phoenixcontact.com/sg/products/3251203>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3251203>



EAC

Approval ID: EACKZ 08593

TB 95 I BU - Feed-through terminal block



3251203

<https://www.phoenixcontact.com/sg/products/3251203>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

TB 95 I BU - Feed-through terminal block



3251203

<https://www.phoenixcontact.com/sg/products/3251203>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg