

# UTI 16-PE - Installation ground terminal block



3073830

<https://www.phoenixcontact.com/sg/products/3073830>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, number of connections: 2, number of positions: 1, connection method: Screw connection, 1st level connection right, Rated cross section: 16 mm<sup>2</sup>, cross section: 6 mm<sup>2</sup> - 25 mm<sup>2</sup>, mounting method: PE foot with mounting screw, M4, mounting type: NS 35/7,5, NS 35/15, color: green-yellow

## Your advantages

- The asymmetrical arrangement of the terminal blocks on the DIN rail enables the neutral busbar to be routed past the terminal blocks
- The installation terminal block features a particularly low-profile design and is suitable for wiring in flat installation distributors

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 3073830                        |
| Packing unit                         | 50 pc                          |
| Minimum order quantity               | 50 pc                          |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | *****                          |
| Product key                          | BE1151                         |
| Catalog page                         | Page 185 (C-1-2019)            |
| GTIN                                 | 4046356347259                  |
| Weight per piece (including packing) | 50.224 g                       |
| Weight per piece (excluding packing) | 47.82 g                        |
| Customs tariff number                | 85369010                       |
| Country of origin                    | CN                             |

# UTI 16-PE - Installation ground terminal block



3073830

<https://www.phoenixcontact.com/sg/products/3073830>

## Technical data

### Product properties

|                       |                       |
|-----------------------|-----------------------|
| Product type          | Ground terminal block |
| Number of positions   | 1                     |
| Number of connections | 2                     |
| Number of rows        | 1                     |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|   |        |
|---|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 2.43 W |

### Connection data

|                                 |                    |
|---------------------------------|--------------------|
| Number of connections per level | 2                  |
| Nominal cross section           | 16 mm <sup>2</sup> |

### 1st level connection right

|   |  |
|---|--|
| Screw thread  | M5   |
| Note  | Please observe the current carrying capacity of the DIN rails. |
| Tightening torque   | 2.5 ... 3 Nm   |
| Stripping length  | 12 mm  |
| Connection in acc. with standard                                  | IEC 60947-7-2  |
| Conductor cross section rigid                                     | 6 mm <sup>2</sup> ... 25 mm <sup>2</sup>                       |
| Cross section AWG   | 8 ... 4 (converted acc. to IEC)                                |
| Conductor cross section flexible                                  | 6 mm <sup>2</sup> ... 16 mm <sup>2</sup>                       |
| Conductor cross section, flexible [AWG]                           | 8 ... 6 (converted acc. to IEC)                                |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 6 mm <sup>2</sup> ... 16 mm <sup>2</sup>                       |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 6 mm <sup>2</sup> ... 16 mm <sup>2</sup>                       |
| Nominal cross section   | 16 mm <sup>2</sup>   |

### Dimensions

|                    |         |
|--------------------|---------|
| Width              | 12.2 mm |
| Height             | 51 mm   |
| Depth              | 49.9 mm |
| Depth on NS 35/7,5 | 50.5 mm |
| Depth on NS 35/15  | 58 mm   |

### Material specifications

|  |              |
|--|--------------|
| Color                                  | green-yellow |
| Flammability rating according to UL 94 | V2           |
| Insulating material group              | I            |

# UTI 16-PE - Installation ground terminal block



3073830

<https://www.phoenixcontact.com/sg/products/3073830>

|   |        |
|---|--------|
| Insulating material   | PA     |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 115 °C |
| Relative insulation material temperature index (Elec., UL 746 B)        | 125 °C |

## Mechanical properties

### General

|                         |   |
|-------------------------|---|
| Terminal block mounting | 1.5 Nm ... 1.8 Nm (PE foot with mounting screw, M4) |
|-------------------------|---|

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Environmental and real-life conditions

### Oscillation/broadband noise

|                        |   |
|------------------------|---|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03                 |
| Spectrum               | Service life test category 1, class B, body mounted |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$      |
| ASD level              | 0.02g <sup>2</sup> /Hz                              |
| Acceleration           | 0.8g  |
| Test duration per axis | 5 h   |
| Test directions        | X-, Y- and Z-axis                                   |
| Result                 | Test passed   |

### Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 5g                                  |
| Shock duration                 | 30 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

### Ambient conditions

|  |  |
|--|--|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)  |
| Ambient temperature (assembly)           | -5 °C ... 70 °C  |
| Ambient temperature (actuation)          | -5 °C ... 70 °C  |
| Permissible humidity (operation)         | 20 % ... 90 %  |
| Permissible humidity (storage/transport) | 30 % ... 70 %  |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|----------------------------------|---------------|

## Mounting

# UTI 16-PE - Installation ground terminal block



3073830

<https://www.phoenixcontact.com/sg/products/3073830>

|                         |   |
|-------------------------|---|
| Mounting type           | NS 35/7,5   |
|                         | NS 35/15  |
| Terminal block mounting | 1.5 Nm ... 1.8 Nm (PE foot with mounting screw, M4) |

# UTI 16-PE - Installation ground terminal block




3073830

<https://www.phoenixcontact.com/sg/products/3073830>

## Drawings

Circuit diagram

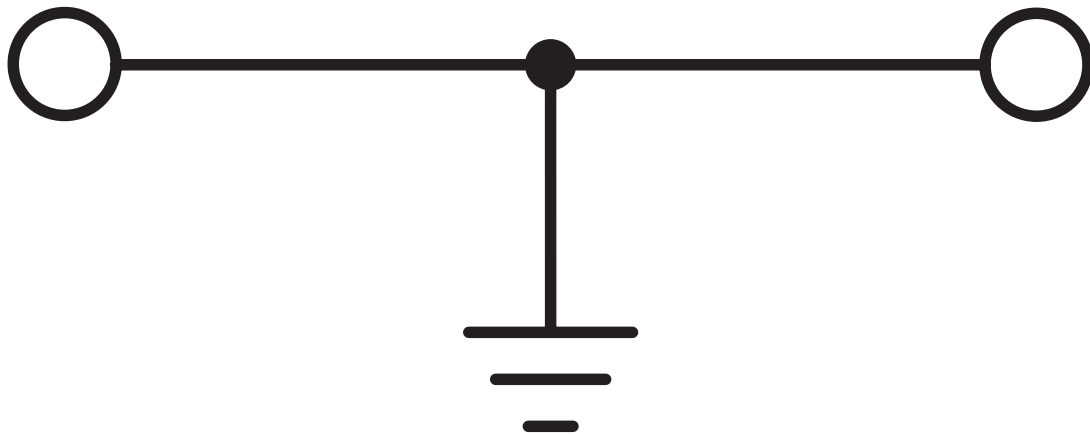

# UTI 16-PE - Installation ground terminal block



3073830

<https://www.phoenixcontact.com/sg/products/3073830>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3073830>



**EAC**

Approval ID: EACKZ 08593

# UTI 16-PE - Installation ground terminal block



3073830

<https://www.phoenixcontact.com/sg/products/3073830>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141141 |
| ECLASS-13.0 | 27250103 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000901 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UTI 16-PE - Installation ground terminal block



3073830

<https://www.phoenixcontact.com/sg/products/3073830>

## Environmental product compliance

### EU RoHS

|   |                    |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

### China RoHS

|  |  |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|  | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.  
105 Eunos Avenue 3, #04-00  
Singapore 409836  
+65 6228 4900  
[marketing@phoenixcontact.com.sg](mailto:marketing@phoenixcontact.com.sg)