


STI 2,5-PE/L/N - Installation ground terminal block



3031843

<https://www.phoenixcontact.com/sg/products/3031843>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, nom. voltage: 400 V, nominal current: 24 A, Spring-cage connection, 1st, 2nd and 3rd level, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Each terminal point can be clearly labeled

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 3031843 |
| Packing unit | 50 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | 0162* |
| Product key | BE2153 |
| Catalog page | Page 289 (C-3-2013) |
| GTIN | 4017918606831 |
| Weight per piece (including packing) | 16.66 g |
| Weight per piece (excluding packing) | 15.502 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

STI 2,5-PE/L/N - Installation ground terminal block



3031843

<https://www.phoenixcontact.com/sg/products/3031843>

Technical data

Product properties

| | |
|-----------------------|-----------------------|
| Product type | Ground terminal block |
| Number of connections | 5 |
| Number of rows | 3 |
| Potentials | 2 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 4 kV |
| Maximum power dissipation for nominal condition | 0.77 W |

Connection data

| | |
|---------------------------------|---------------------|
| Number of connections per level | 2 |
| Nominal cross section | 2.5 mm ² |

1st, 2nd and 3rd level

| | |
|---|--|
| Note | Please observe the current carrying capacity of the DIN rails. |
| Stripping length | 10 mm |
| Internal cylindrical gage | A3 |
| Connection in acc. with standard | IEC 60947-7-1/IEC 60947-7-2 |
| Conductor cross section rigid | 0.08 mm ² ... 4 mm ² |
| Cross section AWG | 28 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.08 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 28 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² |
| Nominal current | 24 A |
| Maximum load current | 24 A (with 4 mm ² conductor cross section) |
| Nominal voltage | 400 V (phase conductor/phase conductor) 250 V (phase conductor/PE) 400 V (phase conductor/N) |
| Nominal cross section | 2.5 mm ² |

Dimensions

| | |
|-----------------|--------|
| Width | 5.2 mm |
| End cover width | 2.2 mm |

Material specifications

STI 2,5-PE/L/N - Installation ground terminal block



3031843

<https://www.phoenixcontact.com/sg/products/3031843>

| | |
|---|-------------|
| Color | gray |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 27,5 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|-----------------------------|
| Connection in acc. with standard | IEC 60947-7-1/IEC 60947-7-2 |
|----------------------------------|-----------------------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

STI 2,5-PE/L/N - Installation ground terminal block




3031843

<https://www.phoenixcontact.com/sg/products/3031843>

Drawings

Circuit diagram

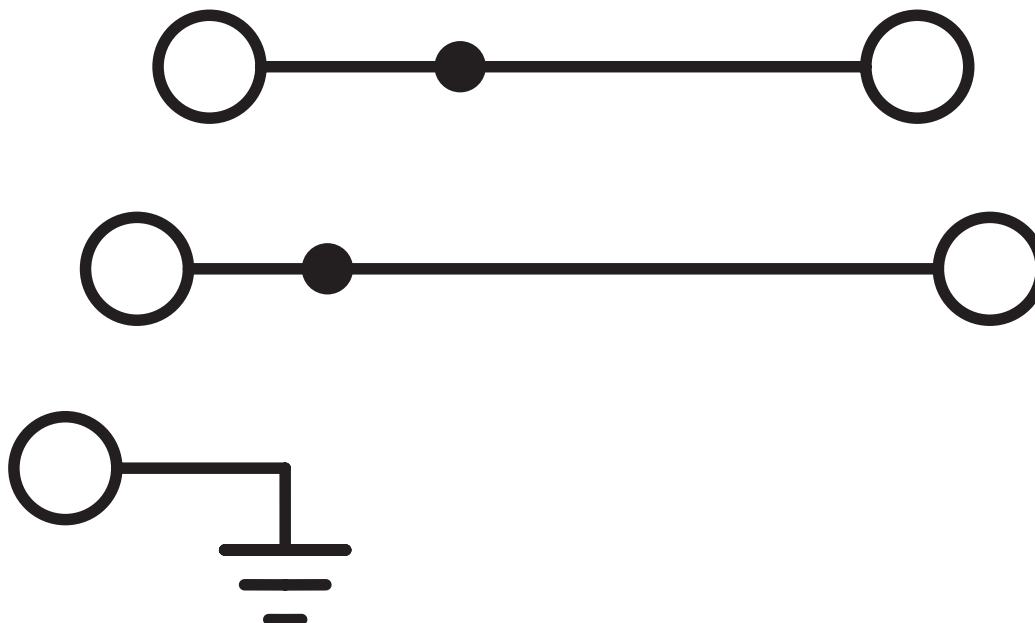

STI 2,5-PE/L/N - Installation ground terminal block



3031843

<https://www.phoenixcontact.com/sg/products/3031843>

Classifications

ECLASS

ECLASS-11.0

27141125

ETIM

ETIM 8.0

EC001329

UNSPSC

UNSPSC 21.0

39121400

STI 2,5-PE/L/N - Installation ground terminal block



3031843

<https://www.phoenixcontact.com/sg/products/3031843>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg