

PP-H 6/ 1-R OG - Plug

3061733

<https://www.phoenixcontact.com/sg/products/3061733>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug, for self-assembly, nom. voltage: 1000 V, nominal current: 41 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1 level, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², color: orange

Your advantages

- Large-surface labeling option
- The Push-in technology COMBI plugs for self-assembly provide solutions that users can implement themselves
- Tested for railway applications

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 3061733 |
| Packing unit | 50 pc |
| Minimum order quantity | 1,000 pc |
| Sales key | ***** |
| Product key | BE2244 |
| GTIN | 4046356897778 |
| Weight per piece (including packing) | 8.213 g |
| Weight per piece (excluding packing) | 8 g |
| Customs tariff number | 85366990 |
| Country of origin | PL |

PP-H 6/ 1-R OG - Plug

3061733

<https://www.phoenixcontact.com/sg/products/3061733>



Technical data

Product properties

| | |
|-----------------------|---------------|
| Product type | Terminal plug |
| Number of positions | 1 |
| Pitch | 8.2 mm |
| Number of connections | 1 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 1.31 W |

Connection data

| | |
|---------------------------------|-------------------|
| Number of connections per level | 1 |
| Nominal cross section | 6 mm ² |

1 level

| | |
|---|---|
| Stripping length | 12 mm |
| Internal cylindrical gage | A5 |
| Connection in acc. with standard | IEC 61984 |
| Conductor cross section rigid | 0.5 mm ² ... 10 mm ² |
| Cross section AWG | 20 ... 8 (converted acc. to IEC) |
| Conductor cross section flexible | 0.5 mm ² ... 6 mm ² |
| Conductor cross section, flexible [AWG] | 20 ... 10 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| Conductor cross-section flexible (2 conductors with the same cross-section, with TWIN ferrule and plastic sleeve) | 0.5 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1.5 mm ² |
| Nominal current | 41 A |
| Maximum load current | 41 A (with 6 mm ² conductor cross section) |
| Nominal voltage | 1000 V |
| Nominal cross section | 6 mm ² |

1 level Connection cross sections directly pluggable

| | |
|---|--|
| Conductor cross section rigid | 1 mm ² ... 10 mm ² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1 mm ² ... 6 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 1 mm ² ... 6 mm ² |

Dimensions

| | |
|--------|---------|
| Width | 8.2 mm |
| Height | 49.3 mm |
| Pitch | 8.2 mm |

Material specifications

| | |
|--|-------------------|
| Color | orange (RAL 2003) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations


| | |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
|----------------------------------|-----------|


Mounting

| | |
|---------------|---|
| Assembly note | Use of a parallel pressing tool is recommended for easy latching of the COMBI connector and coupling elements for self-assembly |
|---------------|---|

Drawings

Schematic diagram

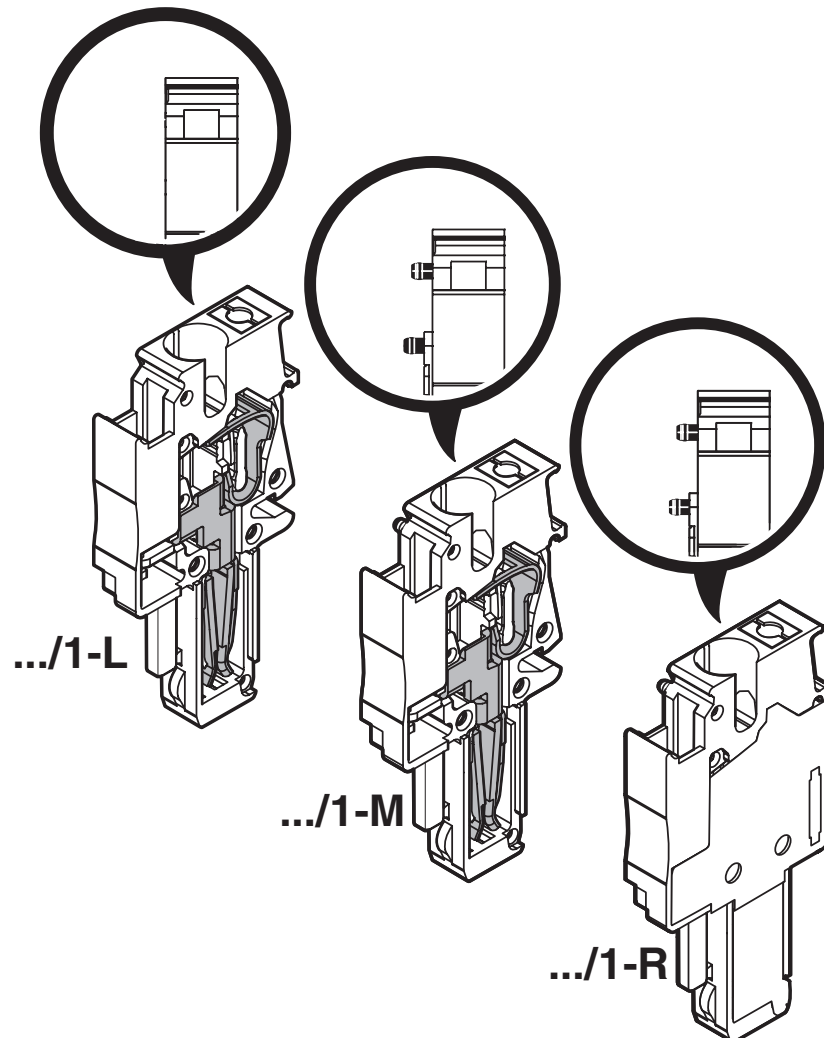

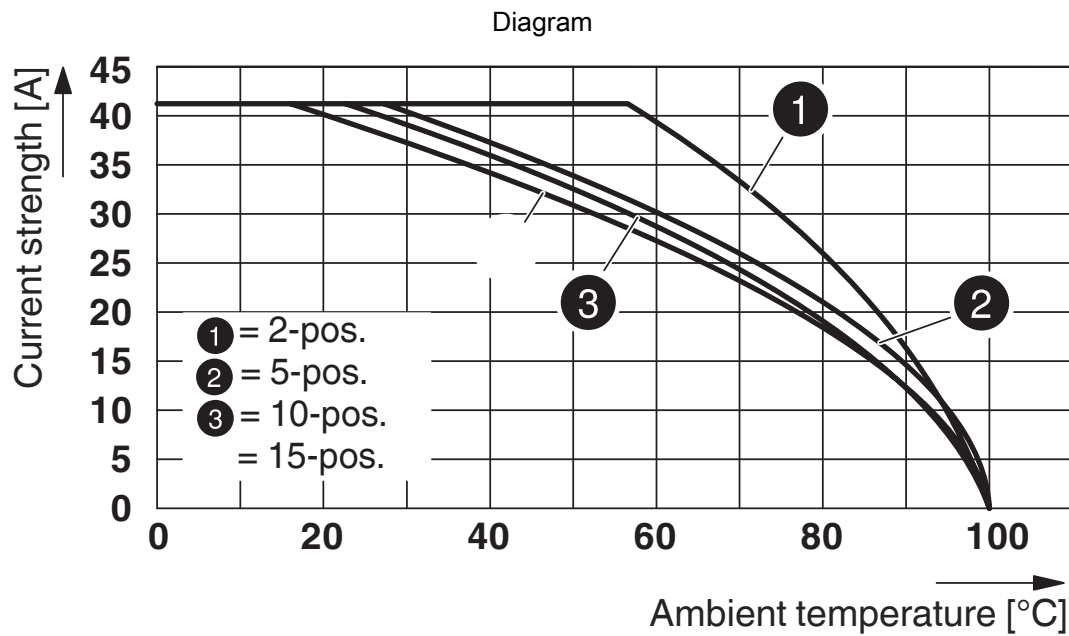

Circuit diagram



PP-H 6/ 1-R OG - Plug

3061733

<https://www.phoenixcontact.com/sg/products/3061733>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141151 |
| ECLASS-13.0 | 27250306 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002021 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

PP-H 6/ 1-R OG - Plug

3061733

<https://www.phoenixcontact.com/sg/products/3061733>



Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg