

TB 2,5-BCVP/1P I - Pluggable feed-through terminal block



3247075

<https://www.phoenixcontact.com/sg/products/3247075>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Pluggable feed-through terminal block, Current and voltage are determined by the plug used., vertical plug-in direction, for receiving one plug, nom. voltage: 250 V, nominal current: 12 A, connection method: Screw/plug-in connection, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², mounting: NS 35/7,5, NS 35/15, NS 32, color: dark gray

Commercial data

Item number	3247075
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	*****
Product key	BEK241
GTIN	4046356713665
Weight per piece (including packing)	6.562 g
Weight per piece (excluding packing)	6.523 g
Customs tariff number	85369010
Country of origin	TR

TB 2,5-BCVP/1P I - Pluggable feed-through terminal block



3247075

<https://www.phoenixcontact.com/sg/products/3247075>

Technical data

Notes

General	Current and voltage are determined by the plug used.
General	
Note	With a free-hanging connection, an insulating foil has to be placed between the plug connection and electrically conductive surfaces.

Product properties

Product type	Plug-in terminal block
Number of positions	1
Number of connections	2
Number of rows	1
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	1.02 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²
Rated cross section AWG	12
Screw thread	M2,5
Tightening torque	0.4 ... 0.5 Nm
Stripping length	8 mm
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.2 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm ² ... 1.5 mm ²
Cross-section with insertion bridge, rigid	1.5 mm ²
Cross-section with insertion bridge, flexible	1.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1 mm ²
2 conductors with the same cross-section AWG rigid	24 ... 16 (converted acc. to IEC)
2 conductors with same cross section, flexible	0.2 mm ² ... 1 mm ²
2 conductors with the same cross-section AWG flexible	24 ... 16 (converted acc. to IEC)
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.2 mm ² ... 0.75 mm ²

TB 2,5-BCVP/1P I - Pluggable feed-through terminal block



3247075

<https://www.phoenixcontact.com/sg/products/3247075>

Nominal current	12 A (with a 2.5 mm ² conductor cross section)
Maximum load current	12 A (with a 2.5 mm ² conductor cross section)
Nominal voltage	250 V
Nominal cross section	2.5 mm ²

Dimensions

Width	5.08 mm
Height	47.8 mm
Depth on NS 32	52 mm
Depth on NS 35/7,5	47 mm
Depth on NS 35/15	54.5 mm

Material specifications

Color	traffic grey B (RAL 7043)
Flammability rating according to UL 94	V0
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

TB 2,5-BCVP/1P I - Pluggable feed-through terminal block




3247075

<https://www.phoenixcontact.com/sg/products/3247075>

Drawings

Circuit diagram

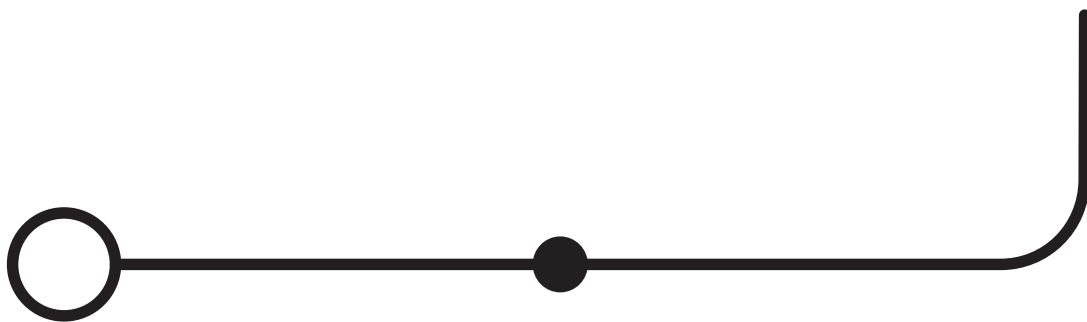


TB 2,5-BCVP/1P I - Pluggable feed-through terminal block



3247075
<https://www.phoenixcontact.com/sg/products/3247075>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3247075>

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	300 V	20 A	20 - 12	-
Use group C				
	300 V	20 A	20 - 12	-

TB 2,5-BCVP/1P I - Pluggable feed-through terminal block



3247075

<https://www.phoenixcontact.com/sg/products/3247075>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250117

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

TB 2,5-BCVP/1P I - Pluggable feed-through terminal block



3247075

<https://www.phoenixcontact.com/sg/products/3247075>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg