


# OTTA 2,5-P/P - Bolt connection terminal block



0790543

<https://www.phoenixcontact.com/sg/products/0790543>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Universal terminal block with bolt connection, with test socket screws, cross section: 0.1 - 2.5 mm<sup>2</sup>, width: 9 mm, color: Gray

## Commercial data

Item number	0790543
Packing unit	50 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	0100*
Product key	BE4513
Catalog page	Page 563 (C-1-2019)
GTIN	4017918005658
Weight per piece (including packing)	12.12 g
Weight per piece (excluding packing)	12.12 g
Customs tariff number	85369010
Country of origin	IN

# OTTA 2,5-P/P - Bolt connection terminal block



0790543

<https://www.phoenixcontact.com/sg/products/0790543>

## Technical data

### Product properties

Product type	Bolt connection terminal block
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	0.77 W

### Connection data

Number of connections per level	2
Nominal cross section	2.5 mm <sup>2</sup>
Stripping length	The stripping length depends on the specification provided by the cable lug manufacturer.
Connection in acc. with standard	IEC 60947-7-1
Nominal current	24 A
Maximum load current	24 A (with a 2.5 mm <sup>2</sup> conductor cross section)
Nominal voltage	800 V (the nominal voltage applies to insulated cable lugs)
Nominal cross section	2.5 mm <sup>2</sup>

### Cable lug connection DIN 46234:1980-03

Connection in acc. with standard	DIN 46234:1980-03
Cross section	0.1 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross section range AWG	24 ... 14 (converted acc. to IEC)
Hole diameter	3.2 mm
Width	7.6 mm
Bolt diameter	3 mm
Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Identification color of ring cable lugs : red	1.5 mm <sup>2</sup>
Identification color of ring cable lugs : blue	2.5 mm <sup>2</sup>
Connection in acc. with standard	DIN 46237:1970-07
Cross section	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross section range AWG	20 ... 14 (converted acc. to IEC)
Hole diameter	3.2 mm
Width	7.6 mm
Bolt diameter	3 mm
Screw thread	M3

# OTTA 2,5-P/P - Bolt connection terminal block



0790543

<https://www.phoenixcontact.com/sg/products/0790543>

Tightening torque	0.6 ... 0.8 Nm
-------------------	----------------

## Dimensions

Width	9 mm
End cover width	1.5 mm
Height	43.5 mm
Depth on NS 32	50.5 mm
Depth on NS 35/7,5	45.5 mm
Depth on NS 35/15	53 mm

## Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Result	Test passed
--------	-------------

### Temperature-rise test

Requirement temperature-rise test	Increase in temperature $\leq$ 45 K
Result	Test passed
Short-time withstand current 2.5 mm <sup>2</sup>	0.3 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	2 kV
Result	Test passed

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Result	Test passed

## Environmental and real-life conditions

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
---------------	-------------------------------------

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

# OTTA 2,5-P/P - Bolt connection terminal block

0790543

<https://www.phoenixcontact.com/sg/products/0790543>



## Drawings

### Circuit diagram




# OTTA 2,5-P/P - Bolt connection terminal block

0790543

<https://www.phoenixcontact.com/sg/products/0790543>

Circuit diagram

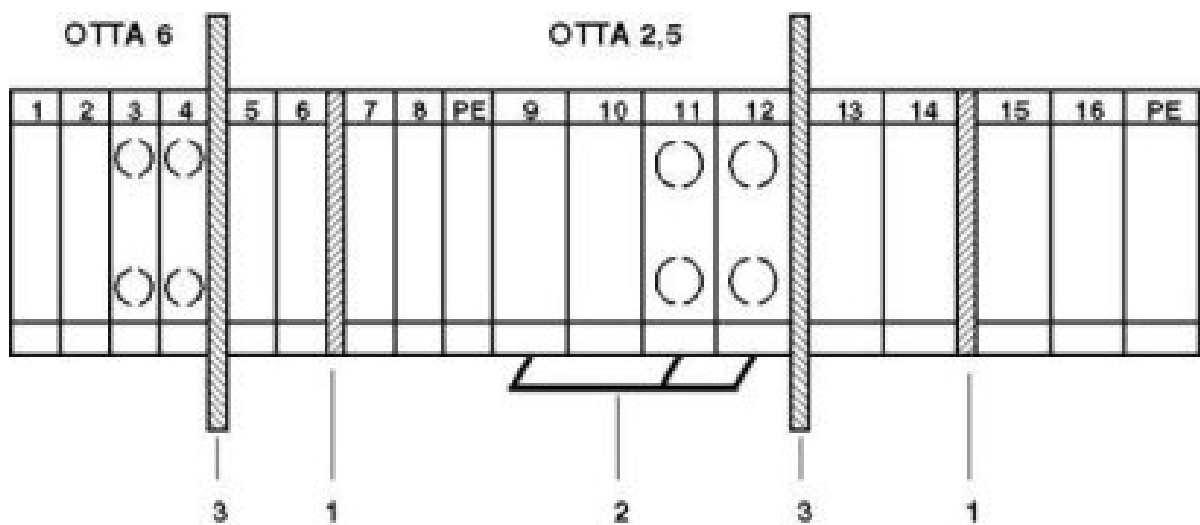

- 1 = cover
- 2 = insertion bridge
- 3 = partition plate

# OTTA 2,5-P/P - Bolt connection terminal block





0790543


<https://www.phoenixcontact.com/sg/products/0790543>


## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/0790543>

 <b>CSA</b> Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	20 A	22 - 14	-

 <b>UL Recognized</b> Approval ID: E60425				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B				
	600 V	20 A	-	-
Use group C				
	600 V	20 A	-	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00540				
---	--	--	--	--

 <b>EAC</b> Approval ID: EACKZ 08593				
--	--	--	--	--

# OTTA 2,5-P/P - Bolt connection terminal block



0790543

<https://www.phoenixcontact.com/sg/products/0790543>

## Classifications

### ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

### ETIM

ETIM 9.0	EC000897
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# OTTA 2,5-P/P - Bolt connection terminal block



0790543

<https://www.phoenixcontact.com/sg/products/0790543>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	3aaf3b96-d54d-494b-b381-0e17628542ad

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

[marketing@phoenixcontact.com.sg](mailto:marketing@phoenixcontact.com.sg)