


TB 4-HESI (5X20) I BU - Fuse terminal block



3246419

<https://www.phoenixcontact.com/sg/products/3246419>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse terminal block, fuse type: G / 5 x 20, nom. voltage: 500 V, nominal current: 6.3 A, connection method: Screw connection, cross section: 0.5 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: blue

Commercial data

Item number	3246419
Packing unit	50 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	*****
Product key	BEK234
GTIN	4046356892940
Weight per piece (including packing)	99.99 g
Weight per piece (excluding packing)	11.869 g
Country of origin	CN

TB 4-HESI (5X20) I BU - Fuse terminal block



3246419

<https://www.phoenixcontact.com/sg/products/3246419>

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Fuse	G / 5 x 20

Connection data

Number of connections per level	2
Nominal cross section	4 mm ²
Rated cross section AWG	10
Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	9 mm
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm ² ... 6 mm ²
Cross section AWG	20 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	20 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, rigid	0.5 mm ² ... 4 mm ²
Cross-section with insertion bridge, flexible	0.5 mm ² ... 4 mm ²
Cross-section with insertion bridge, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, flexible, with ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 1.5 mm ²
2 conductors with the same cross-section AWG rigid	20 ... 14 (converted acc. to IEC)
2 conductors with same cross section, flexible	0.5 mm ² ... 1.5 mm ²
2 conductors with the same cross-section AWG flexible	20 ... 14 (converted acc. to IEC)
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal current	6.3 A (the current is determined by the fuse used)

TB 4-HESI (5X20) I BU - Fuse terminal block



3246419

<https://www.phoenixcontact.com/sg/products/3246419>

Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal voltage	500 V (the voltage is determined by the light indicator.)

Dimensions

Width	8.2 mm
Height	58 mm
Depth on NS 32	53 mm
Depth on NS 35/7,5	48 mm
Depth on NS 35/15	55.5 mm

Material specifications

Color	blue
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	$1.857 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	0.8g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g

TB 4-HESI (5X20) I BU - Fuse terminal block



3246419

<https://www.phoenixcontact.com/sg/products/3246419>

Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

TB 4-HESI (5X20) I BU - Fuse terminal block


3246419

<https://www.phoenixcontact.com/sg/products/3246419>



Drawings

Circuit diagram

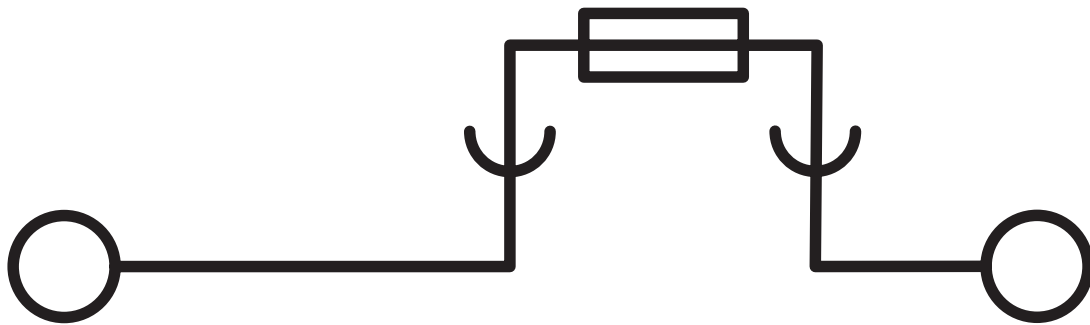

TB 4-HESI (5X20) I BU - Fuse terminal block




3246419

<https://www.phoenixcontact.com/sg/products/3246419>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3246419>

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	600 V	6.3 A	20 - 10	-
Use group C	600 V	6.3 A	20 - 10	-

TB 4-HESI (5X20) I BU - Fuse terminal block



3246419

<https://www.phoenixcontact.com/sg/products/3246419>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

TB 4-HESI (5X20) I BU - Fuse terminal block



3246419

<https://www.phoenixcontact.com/sg/products/3246419>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg