

# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 500 V, nominal current: 6.3 A, connection method: Push-in connection, 1 level, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.5 mm<sup>2</sup>- 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: dark gray

## Your advantages

- The compact design and front connection enable wiring in a confined space
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off

## Commercial data

Item number	1582065
Packing unit	50 pc
Minimum order quantity	100 pc
Note	Made to order (non-returnable)
Sales key	*****
Product key	BEL234
GTIN	4067923073791
Weight per piece (including packing)	10.2 g
Weight per piece (excluding packing)	10.46 g
Customs tariff number	85369095
Country of origin	CN

# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

## Technical data

### Notes

General	The current is determined by the fuse used, the voltage by the light indicator.
---------	---

### Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W
Fuse	G / 5 x 20
Maximum power dissipation	max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

### Connection data

Number of connections per level	2
Nominal cross section	4 mm <sup>2</sup>

#### 1 level

Stripping length	10 mm ... 12 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Cross section AWG	20 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	20 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>

# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

Nominal current	6.3 A
Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal voltage	500 V
Nominal cross section	4 mm <sup>2</sup>

## 1 level Connection cross sections directly pluggable

Conductor cross section rigid	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>

## Dimensions

Width	8.2 mm
End cover width	2.2 mm
Height	67.8 mm
Depth	35.3 mm
Depth on NS 35/7,5	42.8 mm
Depth on NS 35/15	50.3 mm

## Material specifications

Color	traffic grey B (RAL 7043)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Environmental and real-life conditions

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Long life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s <sup>2</sup> )/Hz
Acceleration	3.12g

# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

## Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

## Ambient conditions

Ambient temperature (operation)	-50 °C ... 105 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15


# TBPC 4-HESI (5X20) - Fuse modular terminal block

1582065

<https://www.phoenixcontact.com/sg/products/1582065>

## Drawings

### Application drawing

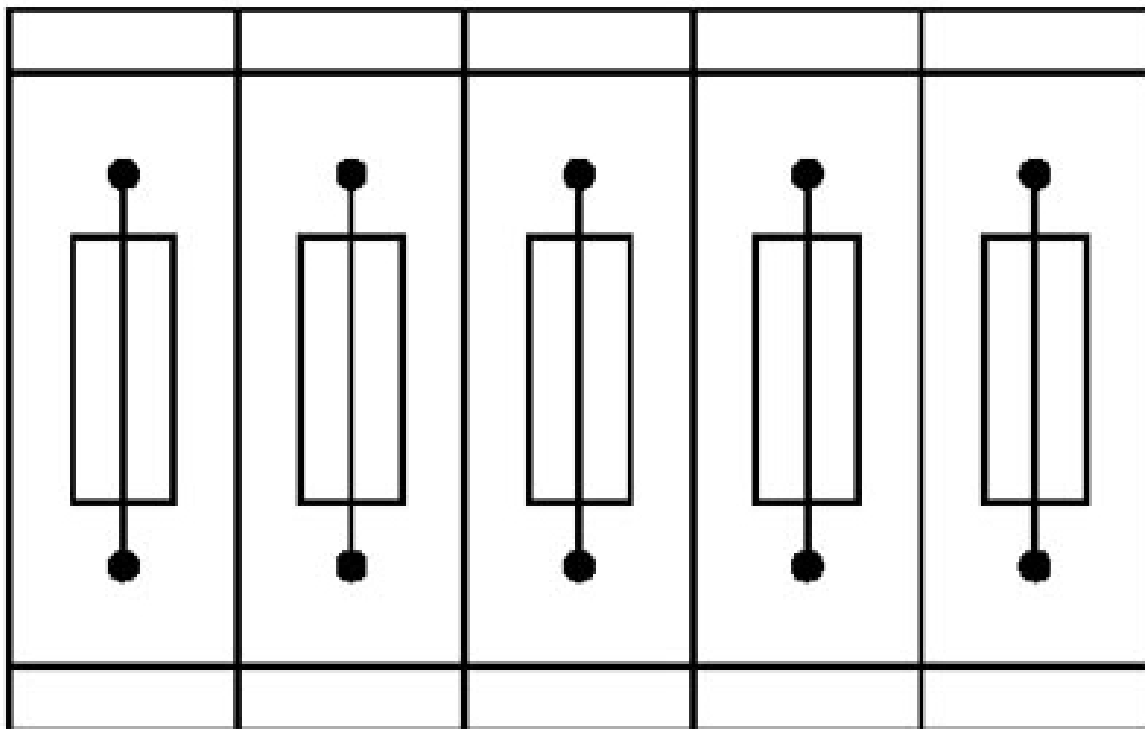

Fuse terminal blocks in interconnected arrangement,  
block consisting of 5 fuse terminal blocks


# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

Application drawing

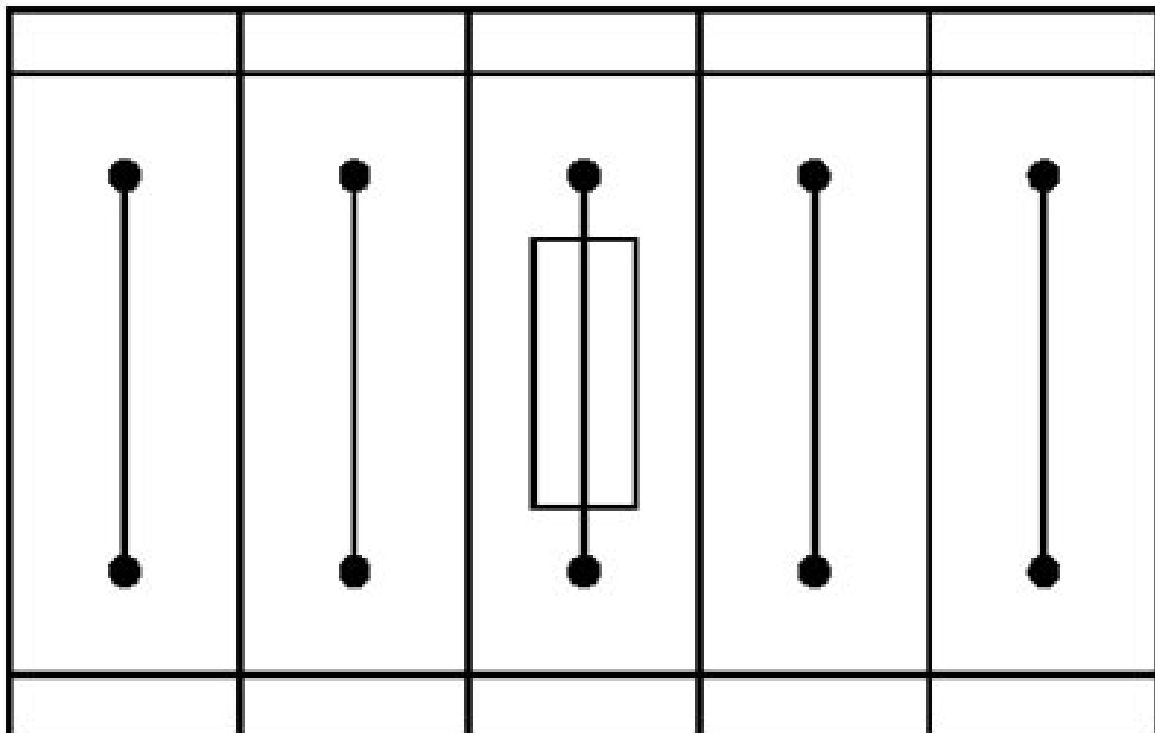

Fuse terminal block in single arrangement,  
block consisting of one fuse terminal block and 4 feed-through terminal blocks


# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

Circuit diagram

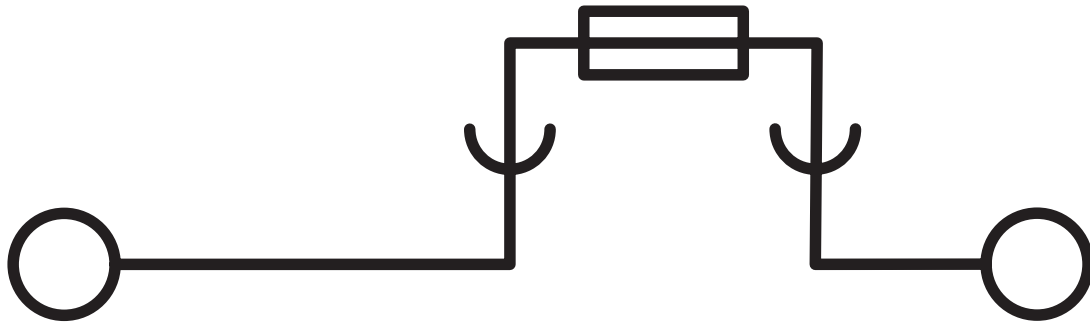

# TBPC 4-HESI (5X20) - Fuse modular terminal block




1582065

<https://www.phoenixcontact.com/sg/products/1582065>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1582065>

 <b>cULus Recognized</b> Approval ID: E60425		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B		300 V	6.3 A	24 - 10	-
Use group C		300 V	6.3 A	24 - 10	-



# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

## Classifications

### ECLASS

ECLASS-13.0

27250113

### ETIM

ETIM 9.0

EC000899

# TBPC 4-HESI (5X20) - Fuse modular terminal block



1582065

<https://www.phoenixcontact.com/sg/products/1582065>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.  
105 Eunos Avenue 3, #04-00  
Singapore 409836  
+65 6228 4900  
[marketing@phoenixcontact.com.sg](mailto:marketing@phoenixcontact.com.sg)