


# STIO 2,5/4-PE/2B/L-LA24GN/O-M - Installation ground terminal block



3209183

<https://www.phoenixcontact.com/sg/products/3209183>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, nom. voltage: 24 V, nominal current: 18 A, number of connections: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- Upper level for signal wiring

## Commercial data

Item number	3209183
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	0163*
Product key	BE2118
Catalog page	Page 215 (C-1-2019)
GTIN	4046356143493
Weight per piece (including packing)	14.45 g
Weight per piece (excluding packing)	14.45 g
Customs tariff number	85369010
Country of origin	TR

# STIO 2,5/4-PE/2B/L-LA24GN/O-M - Installation ground terminal block



3209183

<https://www.phoenixcontact.com/sg/products/3209183>

## Technical data

### Product properties

Product type	Sensor/actuator terminal block
Number of connections	5
Number of rows	3

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.77 W
LED voltage range	15 V DC ... 30 V DC
LED current range	1 mA ... 2.5 mA

### Input data

LED voltage range	15 V DC ... 30 V DC
-------------------	---------------------

### Connection data

Number of connections per level	5
Nominal cross section	2.5 mm <sup>2</sup>
Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	8 mm ... 10 mm
Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
Conductor cross section rigid	0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Cross section AWG	28 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	28 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup>
Nominal current	18 A
Maximum load current	18 A (with 4 mm <sup>2</sup> conductor cross section)
Nominal voltage	24 V (Light indicator, green)
Nominal cross section	2.5 mm <sup>2</sup>

### Dimensions

Width	5.2 mm
End cover width	2.2 mm
Height	92.3 mm

# STIO 2,5/4-PE/2B/L-LA24GN/O-M - Installation ground terminal block



3209183

<https://www.phoenixcontact.com/sg/products/3209183>

Depth on NS 35/7,5	44.5 mm
Depth on NS 35/15	52 mm

## Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
----------------------------------	-----------------------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# STIO 2,5/4-PE/2B/L-LA24GN/O-M - Installation ground terminal block




3209183

<https://www.phoenixcontact.com/sg/products/3209183>

## Drawings

Circuit diagram

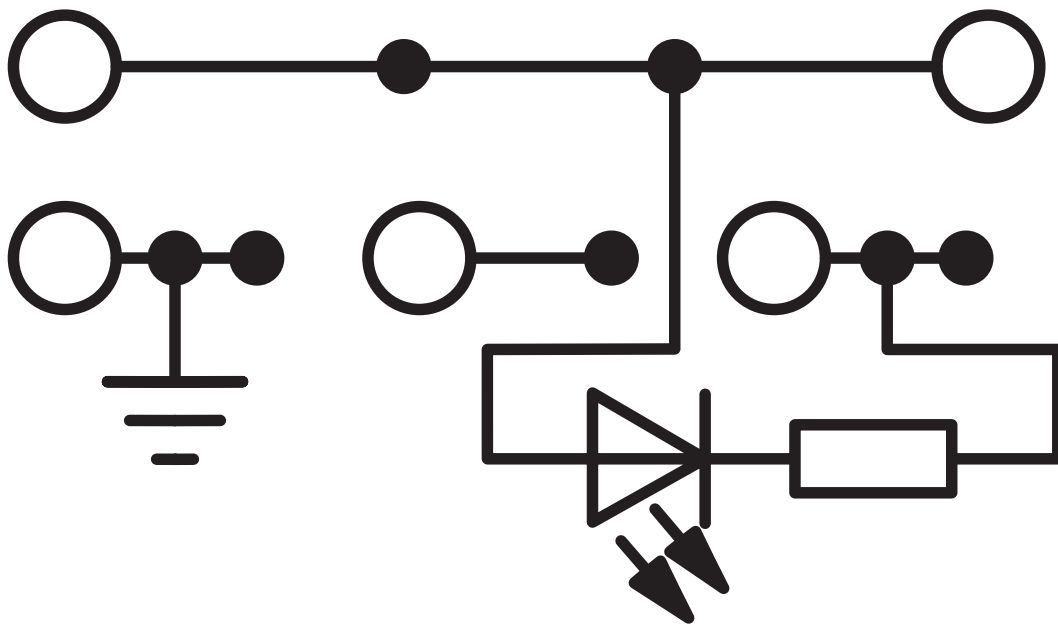

# STIO 2,5/4-PE/2B/L-LA24GN/O-M - Installation ground terminal block



3209183

<https://www.phoenixcontact.com/sg/products/3209183>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3209183>



**EAC**

Approval ID: RU C-DE.BL08.B.00644



**cULus Recognized**

Approval ID: E60425

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B	300 V	10 A	28 - 12	-
Use group C	150 V	18 A	28 - 12	-
Use group D	300 V	10 A	28 - 12	-



**EAC**

Approval ID: EACKZ 08593

# STIO 2,5/4-PE/2B/L-LA24GN/O-M - Installation ground terminal block



3209183

<https://www.phoenixcontact.com/sg/products/3209183>

## Classifications

### ECLASS

ECLASS-11.0	27141128
ECLASS-12.0	27141128
ECLASS-13.0	27250112

### ETIM

ETIM 9.0	EC000900
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# STIO 2,5/4-PE/2B/L-LA24GN/O-M - Installation ground terminal block



3209183

<https://www.phoenixcontact.com/sg/products/3209183>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
SCIP	a4cb165c-d33b-4cae-8b95-11d23a839eb9

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.  
105 Eunos Avenue 3, #04-00  
Singapore 409836  
+65 6228 4900  
[marketing@phoenixcontact.com.sg](mailto:marketing@phoenixcontact.com.sg)