


STI 2,5-PE/L/LTB - Installation ground terminal block



3032130

<https://www.phoenixcontact.com/sg/products/3032130>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, nom. voltage: 400 V, nominal current: 24 A, Spring-cage connection, 1st and 2nd level, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², Rated cross section: 2.5 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- The terminal blocks with knife disconnect zone in the upper level meet the safety requirement regarding individual circuit isolation of DIN VDE 0100-718

Commercial data

Item number	3032130
Packing unit	50 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	0162*
Product key	BE2153
Catalog page	Page 291 (C-3-2013)
GTIN	4017918942090
Weight per piece (including packing)	18.15 g
Weight per piece (excluding packing)	16.992 g
Customs tariff number	85369010
Country of origin	PL

STI 2,5-PE/L/LTB - Installation ground terminal block



3032130

<https://www.phoenixcontact.com/sg/products/3032130>

Technical data

Product properties

Product type	Ground terminal block
Number of connections	5
Number of rows	3
Potentials	2

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²

1st and 2nd level

Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	10 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
Conductor cross section rigid	0.08 mm ² ... 4 mm ²
Cross section AWG	28 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	28 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²
Nominal current	24 A
Maximum load current	24 A (with 4 mm ² conductor cross section)
Nominal voltage	400 V (phase conductor/phase conductor) 250 V (phase conductor/PE and phase conductor/N)
Nominal cross section	2.5 mm ²
Connection in acc. with standard	IEC 60947-7-1
Nominal current	16 A
Maximum load current	16 A
Nominal cross section	2.5 mm ²

Dimensions

Width	5.2 mm
-------	--------

STI 2,5-PE/L/LTB - Installation ground terminal block



3032130

<https://www.phoenixcontact.com/sg/products/3032130>

End cover width	2.2 mm
-----------------	--------

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
	IEC 60947-7-1

Mounting

Mounting type	NS 35/7,5
	NS 35/15

STI 2,5-PE/L/LTB - Installation ground terminal block




3032130

<https://www.phoenixcontact.com/sg/products/3032130>

Drawings

Circuit diagram

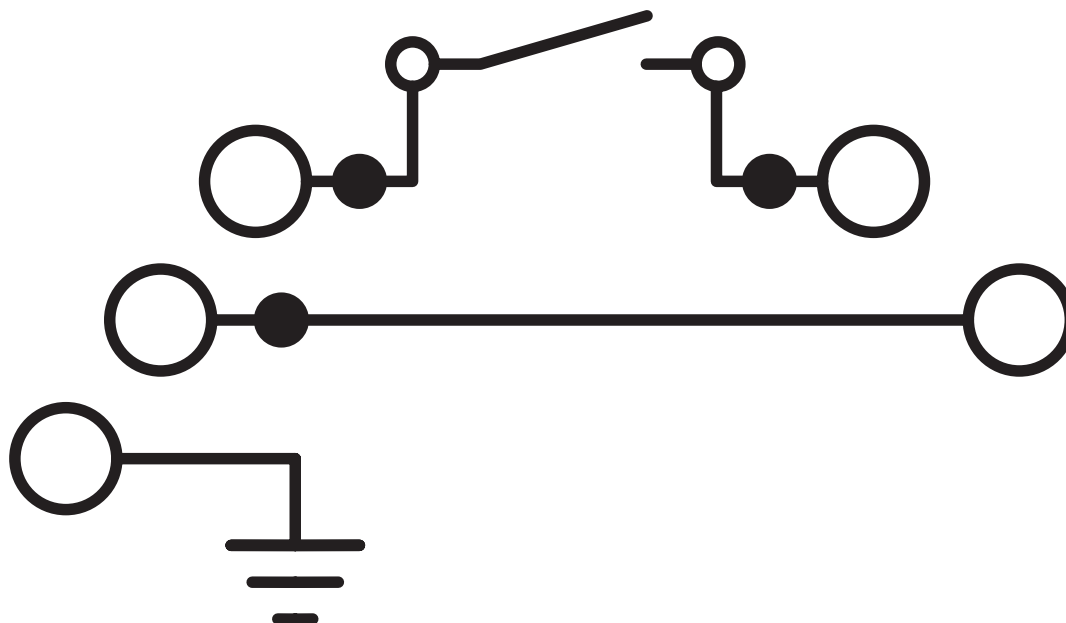

STI 2,5-PE/L/LTB - Installation ground terminal block



3032130

<https://www.phoenixcontact.com/sg/products/3032130>

Classifications

ECLASS

ECLASS-11.0

27141125

ETIM

ETIM 8.0

EC001329

UNSPSC

UNSPSC 21.0

39121400

STI 2,5-PE/L/LTB - Installation ground terminal block



3032130

<https://www.phoenixcontact.com/sg/products/3032130>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg